


Part Number	CBB20-600S303		Revision
Customer P/N			Revision
Capacitance	0.03	uF.	Tolerance 10%
Voltage	600	VAC	
Dielectric		Polypropylene	
Terminal Type		Axial Solid Wire	
Operating Temperature	-55 °C.	to	100 °C.
Dissipation Factor	0.002	maximum	@ 120 Hz.

# MOTOR Capacitors, Inc.

Motor Capacitors, Inc.  
 335 Beinoris Drive  
 Wood Dale, Illinois 60191  
 773-774-6666 (Phone) | 773-774-6690 (Fax)  
[www.capacitorindustries.com](http://www.capacitorindustries.com)  
[info@capacitorindustries.com](mailto:info@capacitorindustries.com)

	Dimension	Tolerance
Width (W)	0.38	0.05
Thickness (T)	0.21	0.05
Length (L)	1.02	0.06
Lead Length (S)	2.00	min.
Lead Gauge (d)	22	AWG

*Dimensions in inches*

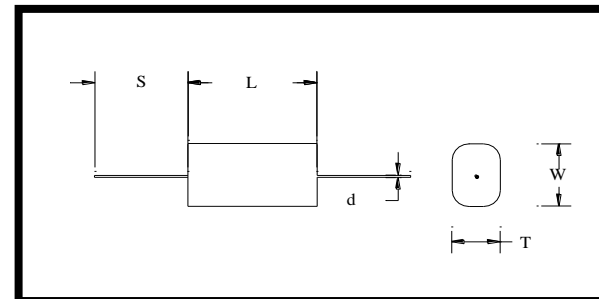

Stamping	C C C
	.03 MFD 10%
	600 - VDC



Engineer JD Aldana  
 Date June 28, 2016