


Part Number	CBB20-600S602		Revision	
Customer P/N			Revision	
Capacitance	0.006	uF.	Tolerance	10%
Voltage	600	VAC		
Dielectric		Polypropylene		
Terminal Type		Axial Solid Wire		
Operating Temperature	-55 °C.	to	100 °C.	
Dissipation Factor	0.002	maximum	@ 120 Hz.	

MOTOR Capacitors, Inc.

Motor Capacitors, Inc.
 335 Beinoris Drive
 Wood Dale, Illinois 60191
 773-774-6666 (Phone) | 773-774-6690 (Fax)
www.capacitorindustries.com
info@capacitorindustries.com

	Dimension	Tolerance
Width (W)	0.25	0.05
Thickness (T)	0.14	0.05
Length (L)	0.80	0.06
Lead Length (S)	2.00	min.
Lead Gauge (d)	24	AWG

Dimensions in inches

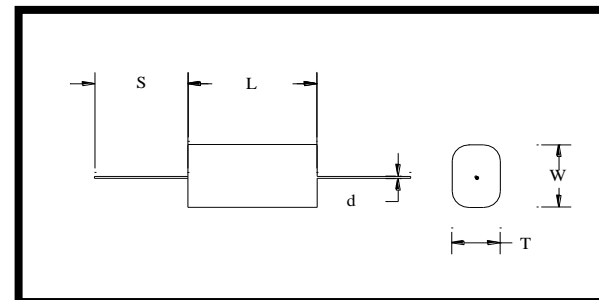

Stamping	C C C
	.006 MFD 10%
	600 - VDC



Engineer JD Aldana
 Date June 28, 2016