

Part Number	<b>CBB5-3GJ005</b>	Revision	
Customer P/N		Revision	
Capacitance	<b>5</b>	uF.	Tolerance <b>5.0%</b>
Voltage	<b>370</b>	VAC	
Dielectric	<b>Metallized Polypropylene</b>		
Terminal Type	<b>Dual .250" X .03" Quick Connect Terminals</b>		
Operating Temperature	<b>-25 °C.-</b>	<b>70 °C.</b>	
Dissipation Factor	<b>0.0015</b>	maximum	@ 60 Hz.

# MOTOR Capacitors, Inc.

Motor Capacitors, Inc.

335 Beinoris Drive

Wood Dale, Illinois 60191


773-774-6666 (Phone) | 773-774-6690 (Fax)

[www.capacitorindustries.com](http://www.capacitorindustries.com)

[info@capacitorindustries.com](mailto:info@capacitorindustries.com)

	Dimension	Tolerance
Diameter (D) Case/Cover	<b>1.64/1.76</b>	<b>0.06</b>
Case Height (H)	<b>2.39</b>	<b>0.06</b>
Terminal Height (K)	<b>0.56</b>	<b>ref.</b>
Terminal-Terminal (M)	<b>0.81</b>	<b>ref.</b>
Insulating Cup (dia.)	<b>0.74</b>	

*Dimensions in inches*

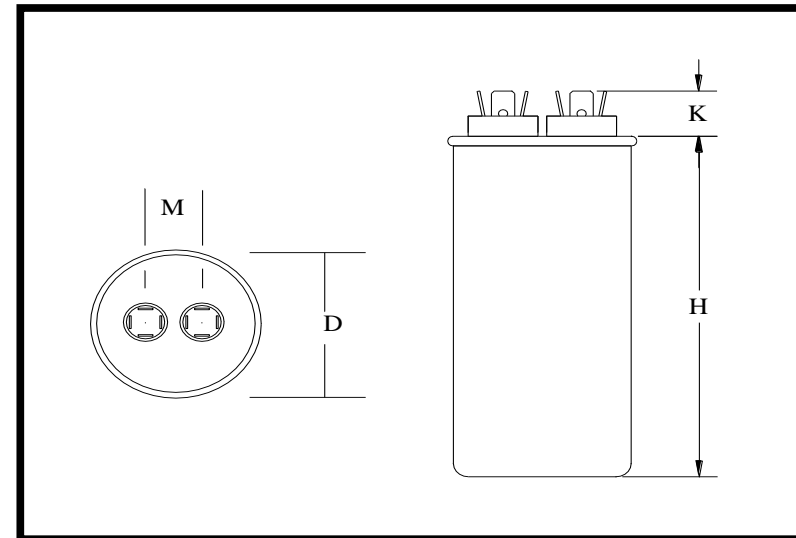

Stamping	Logo
	<b>CBB5</b>
	<b>5 uF ± 5% 370 VAC</b>
	<b>50/60 Hz NO PCB</b>
	<b>MAX TEMP 70 °C</b>
	<b>RU</b>



Approval : J.D. Aldana  
Date : June 20, 2005