Part Number	**CBB5-440V205**		Revision	**12**
Customer P/N	**A-8203-2.0**		Revision	**12**
Capacitance	**2**	uF.	Tolerance	**5.0%**
Voltage	**440**	VAC		
Dielectric	**Metallized Polypropylene**			
Terminal Type	**.250" Quad-Spade Quick Connect Terminals**			
Operating Temperature	**-25** °C.-	**70** °C.		
Dissipation Factor	**0.0015**	maximum @ 60 Hz.		

Motor Capacitors, Inc.
335 Beinoris Drive
Wood Dale, Illinois 60191
773-774-6666 (Phone) | 773-774-6690 (Fax)
www.capacitorindustries.com
info@capacitorindustries.com

	Dimension	Tolerance
Case / Cover Width (W)	**2.03/2.16**	**0.03**
Case / Cover Thickness (T)	**1.23/1.31**	**0.03**
Case Height (H)	**1.60**	**0.06**
Terminal Height (K)	**0.56**	**ref.**
Terminal-Terminal (M)	**0.81**	**ref.**
Insulating Cup (dia.)	**0.74**	
Dimensions in inches		

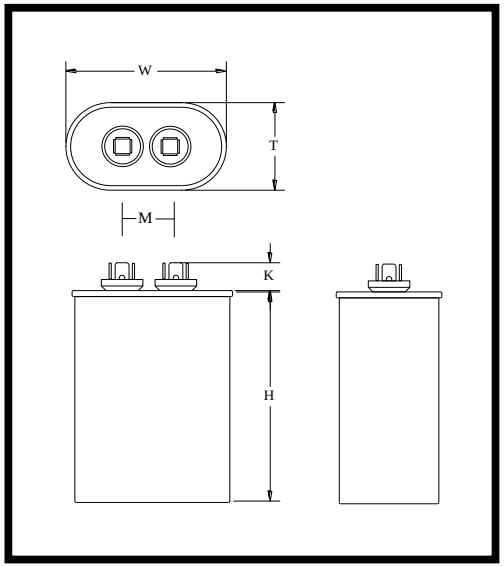

Stamping

Motor Capacitors
CBB5
2 uF. 5% 440V 50/60 Hz. SH Capacitor

+85 C. NON-PCB

ЯU

Cover Dimensions; 2.16" X 1.31" +/-0.03". Insulating Cups; 0.74" diameter.

Approval: *J.D. Aldana*
Date **June 20, 2005**