


Part Number	CBB5-4DJ005		Revision	
Customer P/N			Revision	
Capacitance	5	$\mu\text{F.}$	Tolerance	5.0%
Voltage	440	VAC		
Dielectric	Metallized Polypropylene			
Terminal Type	Dual .250" X .03" Quick Connect Terminals			
Operating Temperature	-25 °C.-		70 °C.	
Dissipation Factor	0.0015	maximum	@ 60 Hz.	

MOTOR Capacitors, Inc.

Motor Capacitors, Inc.
335 Beinoris Drive
Wood Dale, Illinois 60191
773-774-6666 (Phone) | 773-774-6690 (Fax)
www.capacitorindustries.com
info@capacitorindustries.com

	Dimension	Tolerance
Diameter (D) Case/Cover	1.64/1.76	0.06
Case Height (H)	2.39	0.06
Terminal Height (K)	0.56	ref.
Terminal-Terminal (M)	0.81	ref.
Insulating Cup (dia.)	0.74	

Dimensions in inches

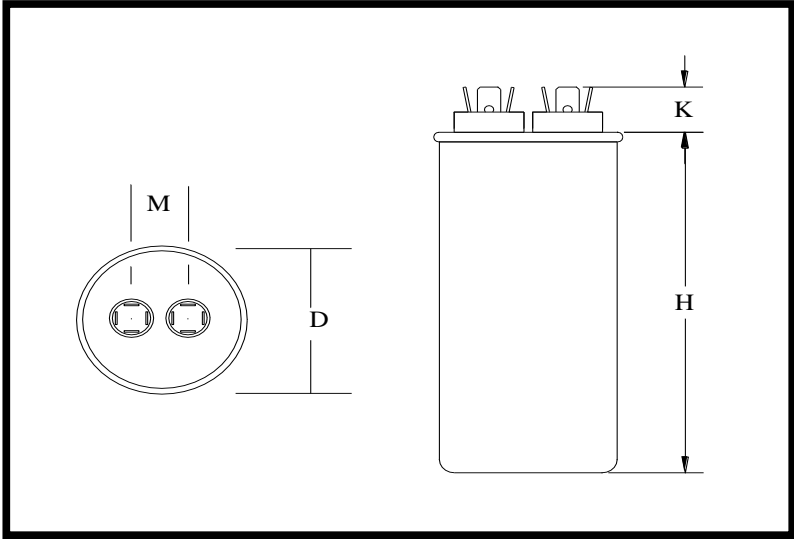

Stamping

Logo
CBB5
5 $\mu\text{F} \pm 5\%$ 440 VAC
50/60 Hz NO PCB
MAX TEMP 70 °C

RU

Approval : *J.D. Aldana*
Date : June 20, 2005