


|                       |  |         |               |             |
|-----------------------|--|---------|---------------|-------------|
| Part Number           | <b>CBB5-4DJ015</b>                               |         | Revision      |             |
| Customer P/N          |  |         | Revision      |             |
| Capacitance           | <b>15</b>  | uF.     | Tolerance     | <b>5.0%</b> |
| Voltage               | <b>440</b>                                       | VAC     |               |             |
| Dielectric            | <b>Metallized Polypropylene</b>                  |         |               |             |
| Terminal Type         | <b>Dual .250" X .03" Quick Connect Terminals</b> |         |               |             |
| Operating Temperature | <b>-25 °C.-</b>                                  |         | <b>70 °C.</b> |             |
| Dissipation Factor    | <b>0.0015</b>                                    | maximum | @ 60 Hz.      |             |

# MOTOR Capacitors, Inc.

**Motor Capacitors, Inc.**  
**335 Beinoris Drive**  
**Wood Dale, Illinois 60191**  
**773-774-6666 (Phone) | 773-774-6690 (Fax)**  
[www.capacitorindustries.com](http://www.capacitorindustries.com)  
[info@capacitorindustries.com](mailto:info@capacitorindustries.com)


|                         | Dimension        | Tolerance   |
|-------------------------|------------------|-------------|
| Diameter (D) Case/Cover | <b>1.66/1.76</b> | <b>0.06</b> |
| Case Height (H)         | <b>2.78</b>      | <b>0.06</b> |
| Terminal Height (K)     | <b>0.56</b>      | <b>ref.</b> |
| Terminal-Terminal (M)   | <b>0.65</b>      | <b>ref.</b> |
| Insulating Cup (dia.)   | <b>0.58</b>      | <b>ref.</b> |

*Dimensions in inches*

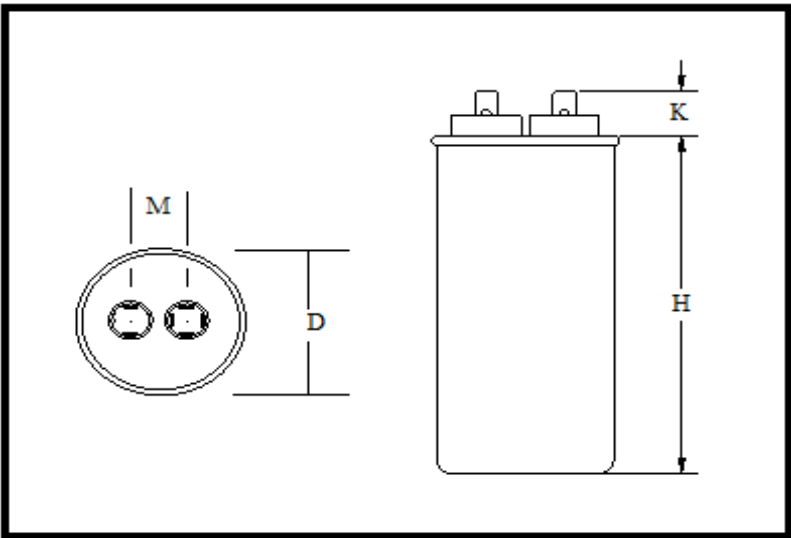

Stamping

**LOGO UL**  
**CBB5**  
**15 UF ± 5% 440 VAC**  
**50/60 HZ NO PCB**  
**MAX TEMP 70 °C**



Approval : *J. D. Aldana*  
Date : June 20, 2005