

Part Number	CBB60B-250F205M8-M1	Revision	
Customer P/N	PE050247	Revision	
Capacitance	2	uF.	Tolerance 5%
Voltage	250	VAC	
Dielectric	Metallized Polypropylene		
Terminal Type	Dual .250" X .03" Quick Connect Terminals		
Operating Temperature	-25	100	°C.
Dissipation Factor	0.001	maximum	@ 60 Hz.


# MOTOR Capacitors, Inc.

Motor Capacitors, Inc.  
 335 Beinoris Drive  
 Wood Dale, Illinois 60191  
 773-774-6666 (Phone) | 773-774-6690 (Fax)  
[www.capacitorindustries.com](http://www.capacitorindustries.com)  
[info@capacitorindustries.com](mailto:info@capacitorindustries.com)

	Dimension	Tolerance
Diameter (D)	1.18	0.03
Height (H)	2.16	0.03
M-8 Stud	YES	
M8 Stud Length (M)	0.50	0.02

Dimensions in inches

<b>Stamping</b>	Motor Capacitors CBB60B-250F205M8-M1 2 uF. +/-5% 250 VAC 50/60 Hz. -25 - +100 C. Date Code ЯU, сЯU, RoHS
-----------------	--

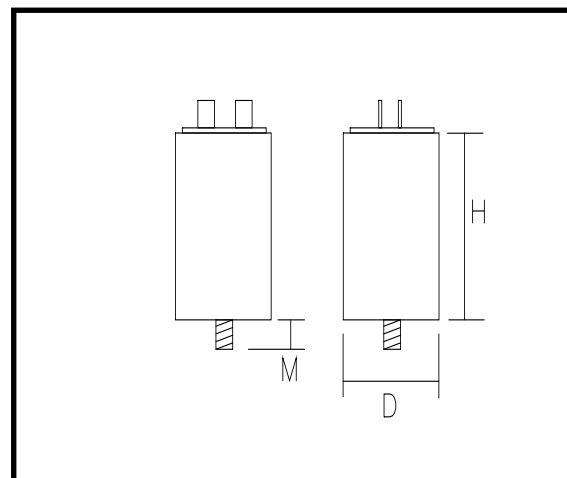

Engineer J.D. Aldana  
 Date July 15, 2008

--