

Part Number	CBB60B-250M805		Revision	
Customer P/N			Revision	
Capacitance	8	uF.	Tolerance	5%
Voltage	250	VAC		
Dielectric	Metallized Polypropylene			
Terminal Type	Insulated Wire Leads			
Operating Temperature	-25	85 °C.		
Dissipation Factor	0.001	maximum	@ 60 Hz.	

# MOTOR Capacitors, Inc.


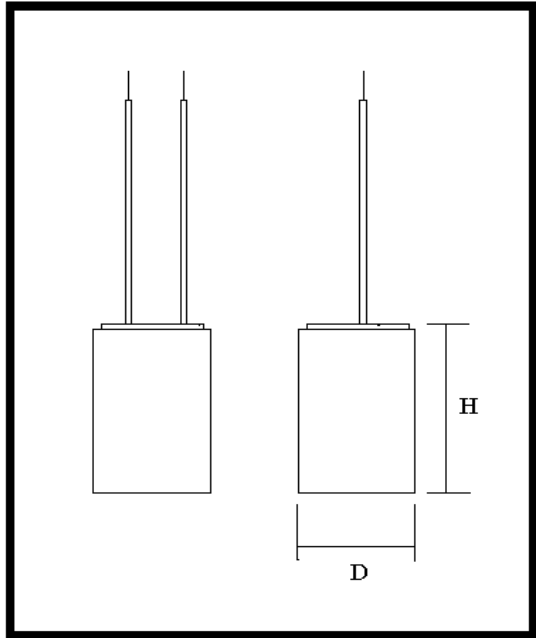
Motor Capacitors, Inc.  
 335 Beinoris Drive  
 Wood Dale, Illinois 60191  
 773-774-6666 (Phone) | 773-774-6690 (Fax)  
[www.capacitorindustries.com](http://www.capacitorindustries.com)  
[info@capacitorindustries.com](mailto:info@capacitorindustries.com)

	Dimension	Tolerance
Diameter (D)	1.18	0.03
Height (H)	2.28	0.03
Wire Length (G)	4	0.50
Wire Gauge (Gw)	18	AWG
Wire Color (Cw)	Black	

*Dimensions in inches*

**Stamping**

RGD - Motor Cap  
 CBB60B-250M805  
 8 uF. +/-5%  
 250 VAC 50/60 Hz.  
 -25 - +85 C.  
 Class A - 30,000 Hours  
 RU cRU EN60252 UL810

Class A - 30,000 Hours

Engineer J.D. Aldana  
 Date September 22, 2014