


Part Number	CBB60B-250N205		Revision
Customer P/N			Revision
Capacitance	2	uF.	Tolerance 5%
Voltage	250	VAC	
Dielectric	Metallized Polypropylene		
Terminal Type	Insulated Wire Leads		
Operating Temperature	-40	85 °C.	
Dissipation Factor	0.001	maximum	@ 60 Hz.


# MOTOR Capacitors, Inc.

Motor Capacitors, Inc.  
 335 Beinoris Drive  
 Wood Dale, Illinois 60191  
 773-774-6666 (Phone) | 773-774-6690 (Fax)  
[www.capacitorindustries.com](http://www.capacitorindustries.com)  
[info@capacitorindustries.com](mailto:info@capacitorindustries.com)

	Dimension	Tolerance
Diameter (D)	1.02	0.03
Height (H)	1.60	0.03
Wire Length (G)	6	0.20
Wire Gauge (Gw)	18	AWG
Wire Color (Cw)	Black	

*Dimensions in inches*

	Stamping
	Motor Capacitors
	CBB60B-250N205
	2 uF. +/-5%
	250 VAC 50/60 Hz.
	-40 - +85 C.
	RU cRU

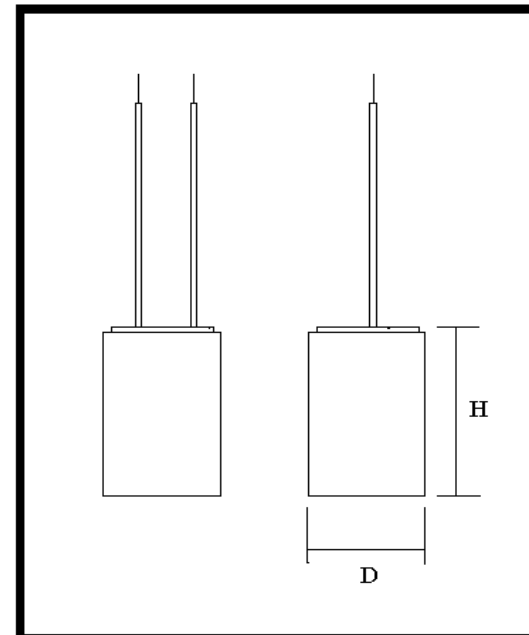

Wire Leads must be Solid Wire

Engineer J.D. Aldana  
 Date December 27, 2013