


| | | | |
|-----------------------|---|------------------|--------------|
| Part Number | CBB60B-370F706 | Revision | E |
| Customer P/N | 652623 | Revision | E |
| Capacitance | 70 | uF. | Tolerance 5% |
| Voltage | 370 | VAC | |
| Dielectric | Metallized Polypropylene | | |
| Terminal Type | Dual .250" X .03" Quick Connect Terminals | | |
| Operating Temperature | -40 | 85 °C. | |
| Dissipation Factor | 0.001 | maximum @ 60 Hz. | |

MOTOR Capacitors, Inc.

Motor Capacitors, Inc.
 335 Beinoris Drive
 Wood Dale, Illinois 60191
 773-774-6666 (Phone) | 773-774-6690 (Fax)
www.capacitorindustries.com
info@capacitorindustries.com

| | Dimension | Tolerance |
|----------------|-----------|-----------|
| Diameter (D) | 1.97 | 0.04 |
| Height (H) | 4.27 | 0.08 |
| M8 Stud Length | no stud | Ref. |

Dimensions in inches

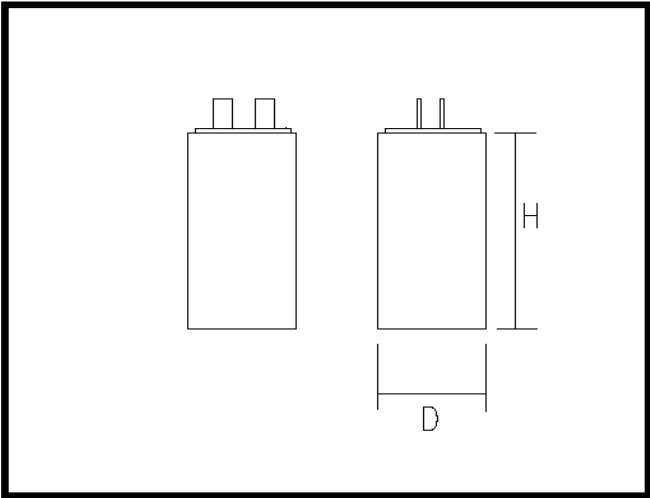

| | |
|-----------------|-------------------------|
| Stamping | Logo / Motor Capacitors |
| | CBB60B-370F706 |
| | 70 uF. +/-5% |
| | 370 VAC 50/60 Hz. |
| | -40 - +85 C. |
| | 652623 |
| | RU, cRU, RoHS |



Aluminum case (blue plastic sleeve)

Approval: J.D. Aldana
 Date: 12/2/2016