


Part Number	CBB60B-370N126		Revision	
Customer P/N			Revision	
Capacitance	12	uF.	Tolerance	5%
Voltage	370	VAC		
Dielectric	Metallized Polypropylene			
Terminal Type	Insulated Wire Leads			
Operating Temperature	-40	85 °C.		
Dissipation Factor	0.001	maximum	@ 60 Hz.	


MOTOR Capacitors, Inc.

Motor Capacitors, Inc.
 335 Beinoris Drive
 Wood Dale, Illinois 60191
 773-774-6666 (Phone) | 773-774-6690 (Fax)
www.capacitorindustries.com
info@capacitorindustries.com

	Dimension	Tolerance
Diameter (D)	1.18	0.03
Height (H)	2.76	0.04
Wire Length (G)	6	0.20
Wire Gauge (Gw)	18	AWG
Wire Color (Cw)	Black	

Dimensions in inches

	Motor Capacitors
	CBB60B-370N126
	12 uF. +/-5%
	370 VAC 50/60 Hz.
	-40 - +85 C.
	0.61 KVAR
	RU cRU

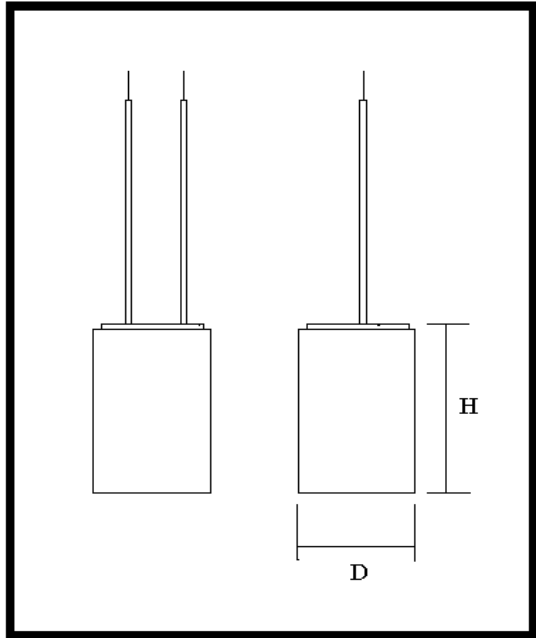

1 Phase 0.61 KVAR Wire Leads must be Solid Wire.

Engineer J.D. Aldana
 Date February 3, 2009