


Part Number	CBB60B-370Z256		Revision
Customer P/N			Revision
Capacitance	25	uF.	Tolerance 5%
Voltage	370	VAC	
Dielectric	Metallized Polypropylene		
Terminal Type	Insulated Wire Leads		
Operating Temperature	-40	85 °C.	
Dissipation Factor	0.01	maximum	@ 60 Hz.


MOTOR Capacitors, Inc.

Motor Capacitors, Inc.
 335 Beinoris Drive
 Wood Dale, Illinois 60191
 773-774-6666 (Phone) | 773-774-6690 (Fax)
www.capacitorindustries.com
info@capacitorindustries.com

	Dimension	Tolerance
Diameter (D)	1.57	0.03
Height (H)	3.21	0.06
Wire Length (G)	8.5	min
Wire Gauge (Gw)	16	AWG
Wire Color (Cw)	Black	

Dimensions in inches

Stamping	Logo - Motor Cap CBB60B-370Z256 25 uF., +/- 5% 370 VAC 50/60 Hz. -40 - +85 C.
	RU, cRU, RoHS

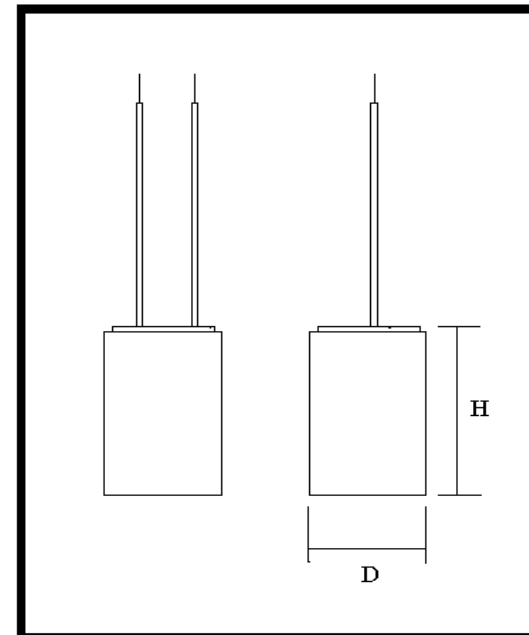

WIRE Leads Must be Rated at 130 C
 Supplied with 8" wire leads

Engineer J.D. Aldana
 Date August 28, 2019