


Part Number	CBB60B-450F456-M8		Revision	1
Customer P/N			Revision	
Capacitance	45	uF.	Tolerance	5%
Voltage	450	VAC		
Dielectric	Metallized Polypropylene			
Terminal Type	Dual .250" X .03" Quick Connect Terminals			
Operating Temperature		-25	85 °C.	
Dissipation Factor	0.001	maximum	@ 60 Hz.	


MOTOR Capacitors, Inc.

Motor Capacitors, Inc.
 335 Beinoris Drive
 Wood Dale, Illinois 60191
 773-774-6666 (Phone) | 773-774-6690 (Fax)
www.capacitorindustries.com
info@capacitorindustries.com

	Dimension	Tolerance
Diameter (D)	1.97	0.03
Height (H)	3.93	0.06
M-8 Stud		
M8 Stud Length (M)	0.50	ref.

Dimensions in inches

	Stamping
	Motor Capacitors
	CBB60B-450F456-M8
	45 uF. +/-5%
	450 VAC 50/60 Hz.
	-25 - +85 C.
	RU

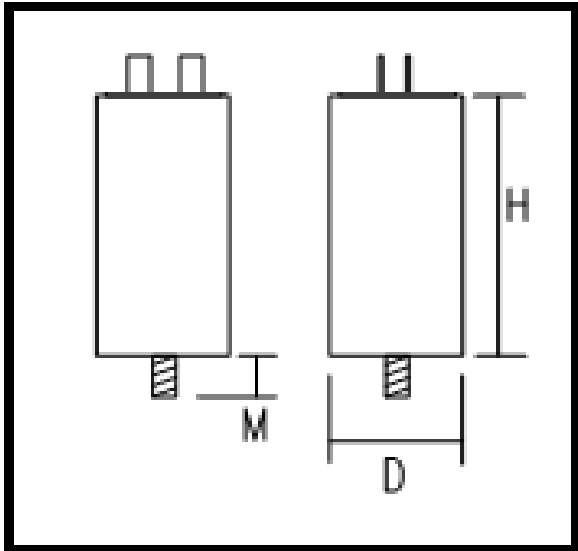

Equipped with M8 Mounting Stud, Lockwasher, and Hex Nut

Engineer J.D. Aldana
 Date June 9, 2017