


Part Number	CBB60B-450M4255	Revision
Customer P/N	BH-7515-71	Revision
Capacitance	42.5 uF.	Tolerance 5%
Voltage	450 VAC	
Dielectric	Metallized Polypropylene	
Terminal Type	Insulated Wire Leads	
Operating Temperature	-25 85 °C.	
Dissipation Factor	0.001 maximum	@ 60 Hz.


# MOTOR Capacitors, Inc.

Motor Capacitors, Inc.  
 335 Beinoris Drive  
 Wood Dale, Illinois 60191  
 773-774-6666 (Phone) | 773-774-6690 (Fax)  
[www.capacitorindustries.com](http://www.capacitorindustries.com)  
[info@capacitorindustries.com](mailto:info@capacitorindustries.com)

	Dimension	Tolerance
Diameter (D)	1.96	0.03
Height (H)	3.54	0.06
Wire Length (G)	6	0.50
Wire Gauge (Gw)	16	AWG
Wire Color (Cw)	Black	

*Dimensions in inches*

	Stamping
	Motor Capacitors
	CBB60B-450M4255
	42.5 uF. +/-5%
	450 VAC 50/60 Hz.
	-25 - +85 C.
	RU, cRU, CE

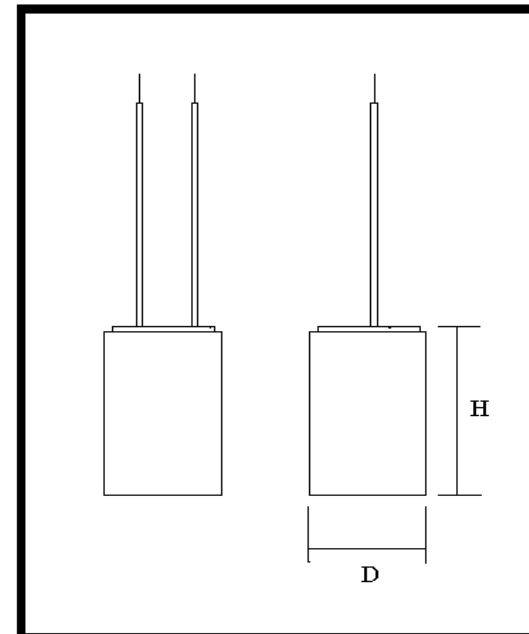

Note: 6" Wire Leads  
 For Use In M-7160

Engineer J.D. Aldana  
 Date November 19, 2019