

Part Number	<b>CBB61-300M106J</b>		Revision
Customer P/N			Revision
Capacitance	<b>10</b>	uF.	Tolerance <b>5%</b>
Voltage	<b>300</b>	VAC	
Dielectric	<b>Metallized Polypropylene</b>		
Terminal Type	<b>Insulated Wire Leads</b>		
Operating Temperature	<b>-25</b>	<b>85 °C.</b>	
Dissipation Factor	<b>0.001</b>	maximum	@ 60 Hz.


# MOTOR Capacitors, Inc.

Motor Capacitors, Inc.  
 335 Beinoris Drive  
 Wood Dale, Illinois 60191  
 773-774-6666 (Phone) | 773-774-6690 (Fax)  
[www.capacitorindustries.com](http://www.capacitorindustries.com)  
[info@capacitorindustries.com](mailto:info@capacitorindustries.com)

	Dimension	Tolerance
Width (W)	<b>2.35</b>	<b>0.06</b>
Thickness (T)	<b>1.77</b>	<b>0.06</b>
Height (H)	<b>1.76</b>	<b>0.06</b>
Total Thickness (Tt)	<b>3.28</b>	<b>ref.</b>
Wire Length (G)	<b>3.00</b>	<b>0.50</b>
Wire Gauge (Gw)	<b>18/20</b>	<b>AWG</b>
Wire Color (Cw)	<b>Gray</b>	
Mounting Tab Thickness (Mt)	<b>0.16</b>	<b>0.02</b>

*Dimensions in inches*

Stamping	<b>Logo / CBB61</b>
	<b>300 VAC 50 Hz</b>
	<b>10 uF ± 5%</b>

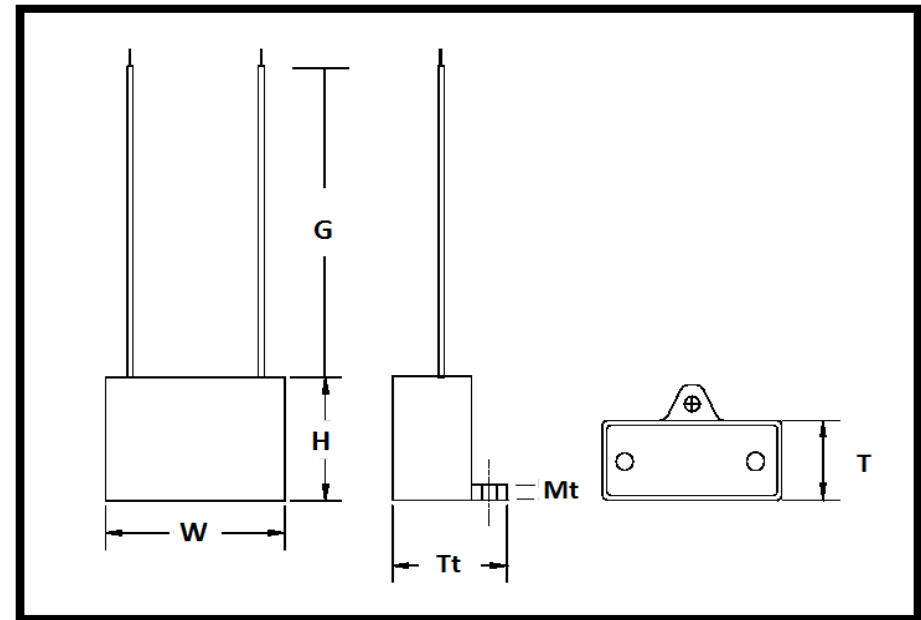

UL Recognized Component

Approval: J.D. Aldana  
 Date: October 18, 2016

**2 mounting tabs on sides**