


Part Number	CBB61-300M1255J		Revision
Customer P/N			Revision
Capacitance	12.5	uF.	Tolerance 5%
Voltage	300	VAC	
Dielectric	Metallized Polypropylene		
Terminal Type	Insulated Wire Leads		
Operating Temperature	-25	85 °C.	
Dissipation Factor	0.001	maximum	@ 60 Hz.


MOTOR Capacitors, Inc.

Motor Capacitors, Inc.
 335 Beinoris Drive
 Wood Dale, Illinois 60191
 773-774-6666 (Phone) | 773-774-6690 (Fax)
www.capacitorindustries.com
info@capacitorindustries.com

	Dimension	Tolerance
Width (W)	2.36	0.06
Thickness (T)	1.77	0.06
Height (H)	1.76	0.06
Total Thickness (Tt)	3.28	ref.
Wire Length (G)	3.00	0.50
Wire Gauge (Gw)	18/20	AWG
Wire Color (Cw)	Gray	
Mountng Tab Thickness (Mt)	0.16	0.02

Dimensions in inches

Stamping	Logo / CBB61
	300 VAC 50 Hz
	12.5 uF ± 5%
	

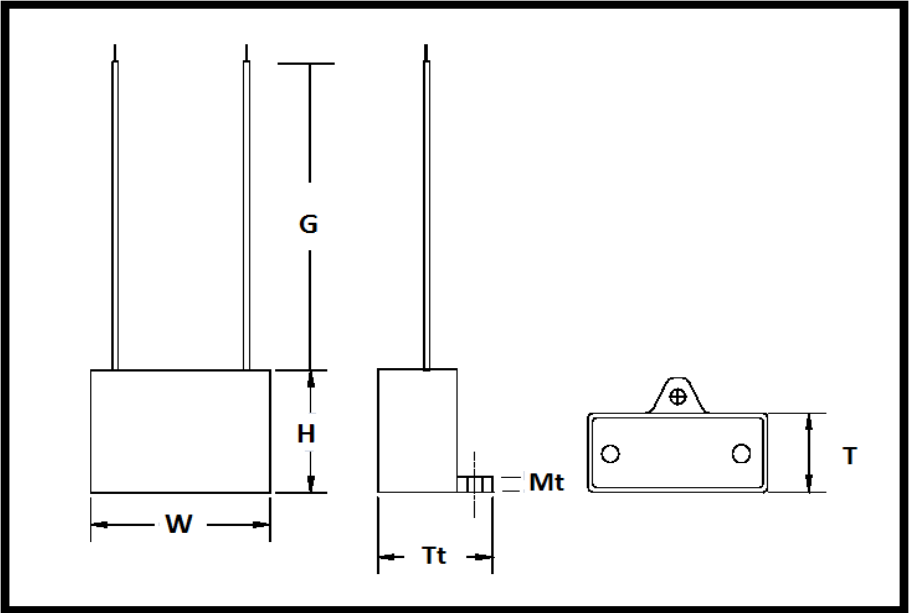

UL Recognized Component

Approval: *J.D. Aldana*
 Date: June 22, 2020

2 mounting tabs on sides