Part Number	**CBB65-100R1756**		Revision	**A**
Customer P/N	**31448-00**		Revision	
Capacitance	**175**	uF.	Tolerance	**5.0%**
Voltage	**100**	VAC		
Dielectric	**Metallized Polypropylene**			
Terminal Type	**.250" Quad-Spade Quick Connect Terminals**			
Operating Temperature	**-40** °C.-	**85** ºC.		
Dissipation Factor	**0.001**	maximum @ 60 Hz.		

MOTOR Capacitors, Inc.

Motor Capacitors, Inc.
335 Beinoris Drive
Wood Dale, Illinois 60191
773-774-6666 (Phone) | 773-774-6690 (Fax)
www.capacitorindustries.com
info@capacitorindustries.com

	Dimension	Tolerance
Diameter (D) Case/Cover	**2.53/2.66**	**0.01**
Case Height (H)	**3.75**	**0.03**
Terminal Height (K)	**0.50**	**max.**
Terminal-Terminal (M)	**0.81**	**ref.**
Insulating Cup (dia.)	**0.74**	

Dimensions in inches

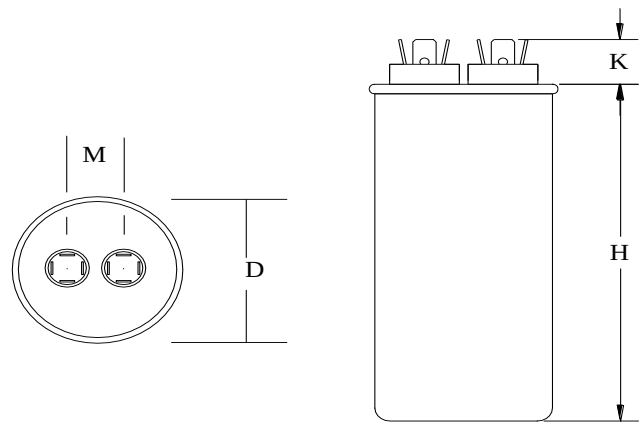

Stamping

Wuxi - Motor Cap
CBB65-100R1756
175uF 5% 100 VAC
-40 - +85 C. 50/60 Hz.
31448-00
Protected 10,000 AFC

Non PCB **ЯU** **cЯU** **Date Code** **RoHS**

Both Terminals Must Have 4-Blades / Insulating Cups must be 0.74" dia.

Approval : J.D. Aldana
Date : **June 29, 2010**