


Part Number	CBB65-100R207	Revision	A
Customer P/N	K01666-0065	Revision	A
Capacitance	200	uF.	Tolerance 10.0%
Voltage	100	VAC	
Dielectric	Metallized Polypropylene		
Terminal Type	.250" Quad-Spade Quick Connect Terminals		
Operating Temperature	-40 °C.-	85 °C.	
Dissipation Factor	0.001	maximum	@ 60 Hz.

MOTOR Capacitors, Inc.

Motor Capacitors, Inc.
335 Beinoris Drive
Wood Dale, Illinois 60191
773-774-6666 (Phone) | 773-774-6690 (Fax)
www.capacitorindustries.com
info@capacitorindustries.com

	Dimension	Tolerance
Diameter (D) Case/Cover	2.53/2.66	0.01
Case Height (H)	3.75	0.03
Terminal Height (K)	0.50	max.
Terminal-Terminal (M)	0.81	ref.
Insulating Cup (dia.)	0.74	

Dimensions in inches

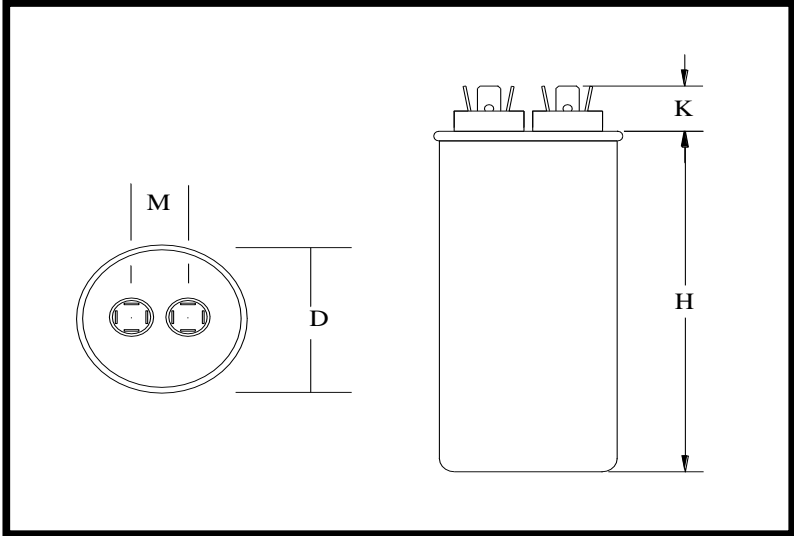

Stamping	Motor Cap			
	CBB65-100R207			
	200uF 10% 100 VAC			
	-40 - +85 C. 50/60 Hz.			
	K01666-0065			
	No PCB's			
Non PCB	RU	cRU	Date Code	RoHS



Both Terminals Must Have 4-Blades / Insulating Cups must be 0.74" dia.

Approval : *J.D. Aldana*
Date : **October 13, 2003**