


| | | | |
|-----------------------|---|---------------|------------------------|
| Part Number | CBB65-220R406 | Revision | 3 |
| Customer P/N | 6100-6047 | Revision | 3 |
| Capacitance | 40 | uF. | Tolerance 10.0% |
| Voltage | 220 | VAC | |
| Dielectric | Metallized Polypropylene | | |
| Terminal Type | .250" Quad-Spade Quick Connect Terminals | | |
| Operating Temperature | -25 °C.- | 85 °C. | |
| Dissipation Factor | 0.001 | maximum | @ 60 Hz. |

MOTOR Capacitors, Inc.

Motor Capacitors, Inc.
335 Beinoris Drive
Wood Dale, Illinois 60191
773-774-6666 (Phone) | 773-774-6690 (Fax)
www.capacitorindustries.com
info@capacitorindustries.com

| | Dimension | Tolerance |
|-------------------------|------------------|-------------|
| Diameter (D) Case/Cover | 1.77/1.87 | 0.06 |
| Case Height (H) | 2.88 | 0.03 |
| Terminal Height (K) | 0.50 | 0.06 |
| Terminal-Terminal (M) | 0.81 | ref. |
| Insulating Cup (dia.) | 0.74 | |

Dimensions in inches

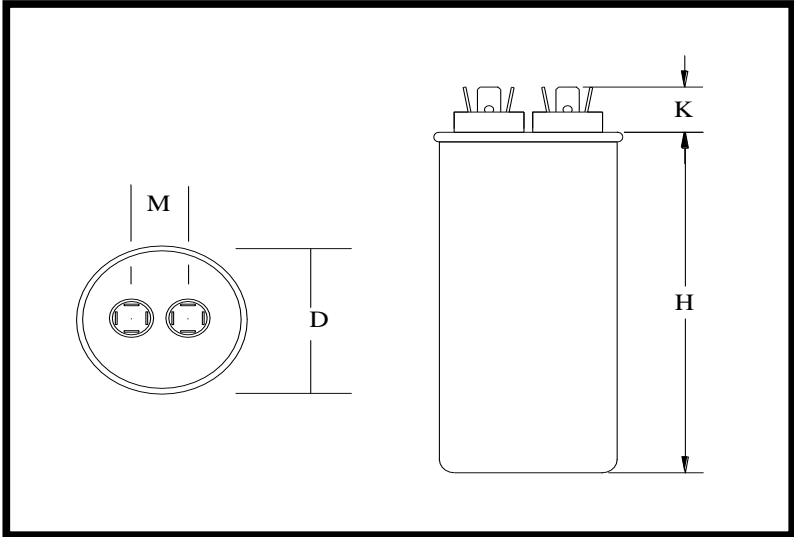


Stamping

Wuxi - Motor Cap
CBB65-220R406
40uF 10% 220 VAC
-25 - +85 C. 50/60 Hz.
6100-6047

Protected 10,000 AFC

Non PCB **RU** **cRU** **Date Code** **RoHS**



Capacitance Tolerance must be +/-10%

Approval : *J.D. Aldana*
Date : July 21, 2005