


Part Number	CBB65-240R306	Revision	13
Customer P/N	195-200-1008	Revision	13
Capacitance	30	uF.	Tolerance 5.0%
Voltage	240	VAC	
Dielectric	Metallized Polypropylene		
Terminal Type	.250" Quad-Spade Quick Connect Terminals		
Operating Temperature	-40 °C.-	85 °C.	
Dissipation Factor	0.001	maximum	@ 60 Hz.

MOTOR Capacitors, Inc.

Motor Capacitors, Inc.
335 Beinoris Drive
Wood Dale, Illinois 60191
773-774-6666 (Phone) | 773-774-6690 (Fax)
www.capacitorindustries.com
info@capacitorindustries.com

	Dimension	Tolerance
Diameter (D) Case/Cover	1.77/1.87	0.06
Case Height (H)	2.88	0.03
Terminal Height (K)	0.50	0.06
Terminal-Terminal (M)	0.81	ref.
Insulating Cup (dia.)	0.74	

Dimensions in inches

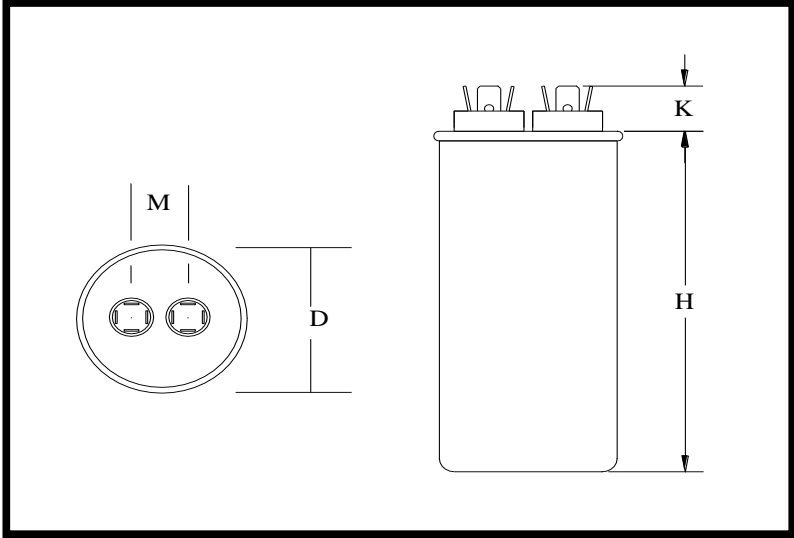


Stamping

Wuxi - Motor Cap
CBB65-240R306
30uF 5% 240 VAC
-40 - +85 C. 50/60 Hz.
195-200-1008

Protected 10,000 AFC

Non PCB RU cRU Date Code RoHS




Approval : *J.D. Aldana*
Date : July 21, 2005