


Part Number	CBB65-240R506	Revision	
Customer P/N	003014.02	Revision	
Capacitance	50	uF.	Tolerance 10.0%
Voltage	240	VAC	
Dielectric	Metallized Polypropylene		
Terminal Type	.250" Quad-Spade Quick Connect Terminals		
Operating Temperature	-40 °C.-	70 °C.	
Dissipation Factor	0.001	maximum	@ 60 Hz.

MOTOR Capacitors, Inc.

Motor Capacitors, Inc.
335 Beinoris Drive
Wood Dale, Illinois 60191
773-774-6666 (Phone) | 773-774-6690 (Fax)
www.capacitorindustries.com
info@capacitorindustries.com

	Dimension	Tolerance
Diameter (D) Case/Cover	1.77/1.87	0.06
Case Height (H)	3.88	max.
Terminal Height (K)	0.50	0.06
Terminal-Terminal (M)	0.81	ref.
Insulating Cup (dia.)	0.74	

Dimensions in inches

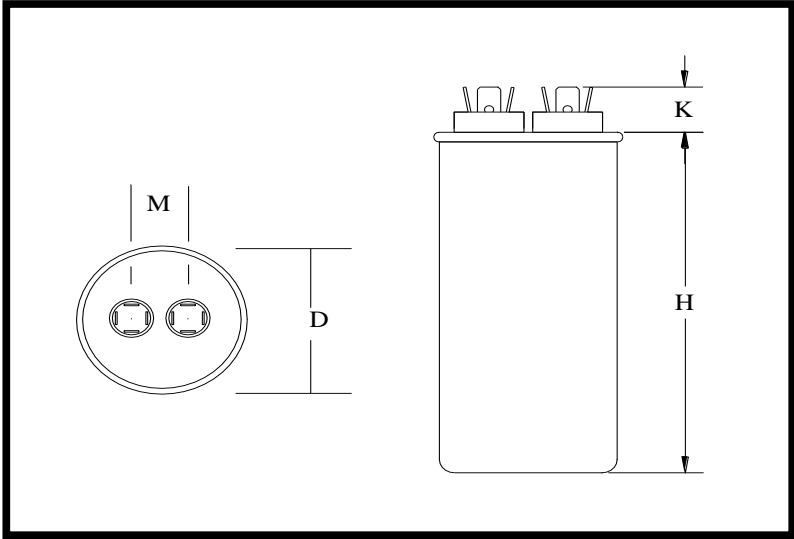


Stamping

Wuxi - Motor Cap
CBB65-240R506
50uF 10% 240 VAC
-40 - +70 C. 50/60 Hz.
003014.02

Protected 10,000 AFC

Non PCB **RU** **cRU** **Date Code** **RoHS**



Meet EIA Standard RS-456

Approval : *J.D. Aldana*
Date : **June 29, 2010**