


Part Number	CBB65-240R706-M8		Revision
Customer P/N			Revision
Capacitance	70	μF .	Tolerance 5.0%
Voltage	240	VAC	
Dielectric	Metallized Polypropylene		
Terminal Type	.250" Quad-Spade Quick Connect Terminals		
Operating Temperature	-40 °C.-	85 °C.	
Dissipation Factor	0.001	maximum	@ 60 Hz.

MOTOR Capacitors, Inc.

Motor Capacitors, Inc.
335 Beinoris Drive
Wood Dale, Illinois 60191
773-774-6666 (Phone) | 773-774-6690 (Fax)
www.capacitorindustries.com
info@capacitorindustries.com

	Dimension	Tolerance
Diameter (D) Case/Cover	1.96	0.06
Case Height (H)	3.94	0.06
Terminal Height (K)	0.50	0.06
Terminal-Terminal (M)	0.81	ref.
Insulating Cup (dia.)	0.74	

Dimensions in inches

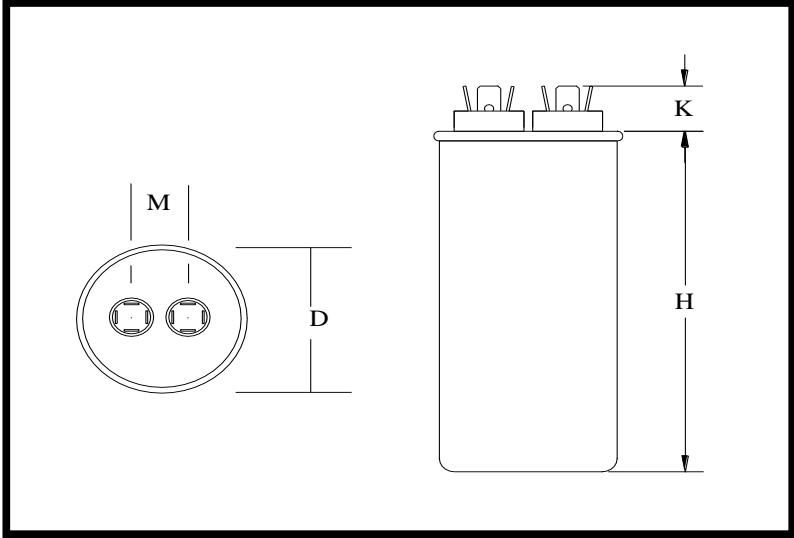

Stamping	Wuxi - Motor Cap			
	CBB65-240R706-M8			
	70uF 5% 240 VAC			
	-40 - +85 C. 50/60 Hz.			
	Protected 10,000 AFC			
Non PCB	RU	cRU	Date Code	RoHS

M-8 Bottom Mounting Stud.

Approval : *J.D. Aldana*
Date : **March 30, 2011**