

|                       |  |         |                       |
|-----------------------|--|---------|-----------------------|
| Part Number           | <b>CBB65-250R205</b>                               |         | Revision              |
| Customer P/N          |  |         | Revision              |
| Capacitance           | <b>2</b>   | µF.     | Tolerance <b>5.0%</b> |
| Voltage               | <b>250</b>   | VAC     |                       |
| Dielectric            | <b>Metallized Polypropylene</b>                    |         |                       |
| Terminal Type         | <b>Single .250" X .03" Quick Connect Terminals</b> |         |                       |
| Operating Temperature | <b>-25 °C.-</b>                                    |         | <b>85 °C.</b>         |
| Dissipation Factor    | <b>0.001</b>                                       | maximum | @ 60 Hz.              |

# MOTOR Capacitors, Inc.

**Motor Capacitors, Inc.**

**335 Beinoris Drive**

**Wood Dale, Illinois 60191**


**773-774-6666 (Phone) | 773-774-6690 (Fax)**

[www.capacitorindustries.com](http://www.capacitorindustries.com)

[info@capacitorindustries.com](mailto:info@capacitorindustries.com)

|                         | Dimension        | Tolerance   |
|-------------------------|------------------|-------------|
| Diameter (D) Case/Cover | <b>1.57/1.67</b> | <b>0.06</b> |
| Case Height (H)         | <b>2.16</b>      | <b>0.06</b> |
| Terminal Height (K)     | <b>0.56</b>      | <b>ref.</b> |
| Terminal-Terminal (M)   | <b>0.81</b>      | <b>ref.</b> |
| Insulating Cup (dia.)   | <b>0.74</b>      |             |

*Dimensions in inches*

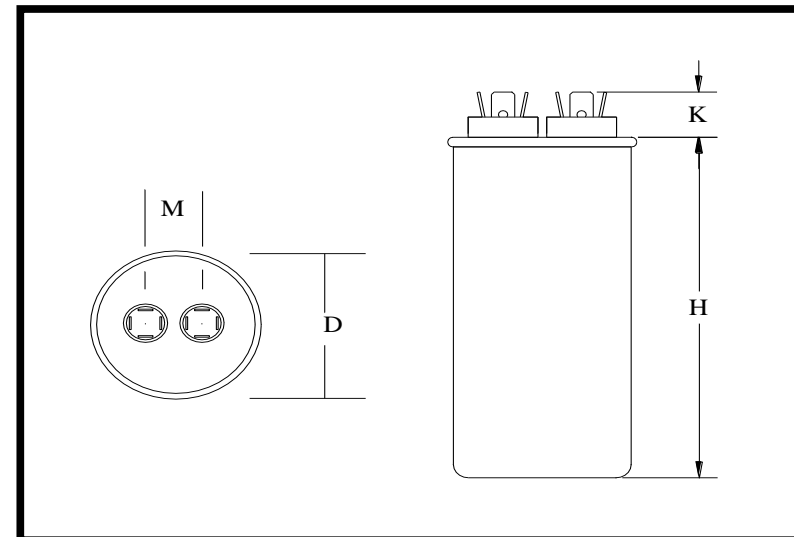

Stamping

**Wuxi - Motor Cap**  
**CBB65-250R205**  
**2µF 5% 250 VAC**  
**-25 - +85 C. 50/60 Hz.**

**Protected 10,000 AFC**

**Non PCB**    **RU**    **cRU**    **Date Code**    **RoHS**

**CU** **US**

Approval : J.D. Aldana  
Date : March 16, 2004

