


Part Number	CBB65-250R206	Revision	A
Customer P/N	3133	Revision	A
Capacitance	20	uF.	Tolerance 5.0%
Voltage	250	VAC	
Dielectric	Metallized Polypropylene		
Terminal Type	Single .250" X .03" Quick Connect Terminals		
Operating Temperature	-40 °C.-	85 °C.	
Dissipation Factor	0.001	maximum	@ 60 Hz.


MOTOR Capacitors, Inc.

Motor Capacitors, Inc.
 335 Beinoris Drive
 Wood Dale, Illinois 60191
 773-774-6666 (Phone) | 773-774-6690 (Fax)
www.capacitorindustries.com
info@capacitorindustries.com

	Dimension	Tolerance
Diameter (D) Case/Cover	1.57/1.67	0.06
Case Height (H)	2.55	max.
Terminal Height (K)	0.56	ref.
Terminal-Terminal (M)	0.81	ref.
Insulating Cup (dia.)	0.74	ref.

Dimensions in inches

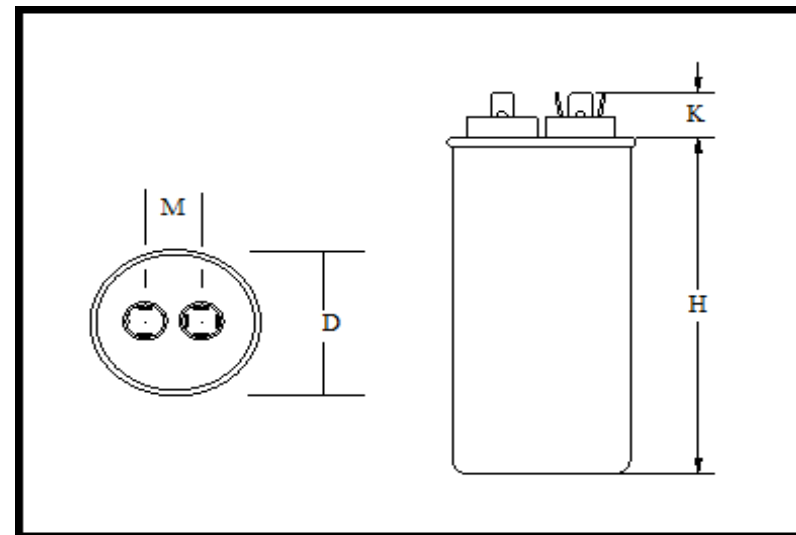

Stamping	Wuxi - Motor Cap		
	CBB65-250R206		
	20uF 5% 250 VAC		
	-25 - +85 C. 50/60 Hz.		
	Protected 10,000 AFC		US
Non PCB	RU	cRU	Date Code RoHS



Approval : *J.D. Aldana*
 Date : April 3, 2017