Part Number	**CBB65-250R856-M8**		Revision	
Customer P/N	**CAP1021**		Revision	
Capacitance	**85**	uF.	Tolerance	**5.0%**
Voltage	**250**	VAC		
Dielectric	**Metallized Polypropylene**			
Terminal Type	**.250" Quad-Spade Quick Connect Terminals**			
Operating Temperature	**-40** °C.-	**85** °C.		
Dissipation Factor	**0.001**	maximum @ 60 Hz.		

MOTOR Capacitors, Inc.

Motor Capacitors, Inc.
335 Beinoris Drive
Wood Dale, Illinois 60191
773-774-6666 (Phone) | 773-774-6690 (Fax)
www.capacitorindustries.com
info@capacitorindustries.com

	Dimension	Tolerance
Diameter (D) Case/Cover	**1.97/2.06**	**0.06**
Case Height (H)	**4.53**	**0.06**
Terminal Height (K)	**0.56**	**ref.**
Terminal-Terminal (M)	**0.81**	**ref.**
Insulating Cup (dia.)	**0.74**	
Bottom Mounting Stud	**Yes**	

Dimensions in inches

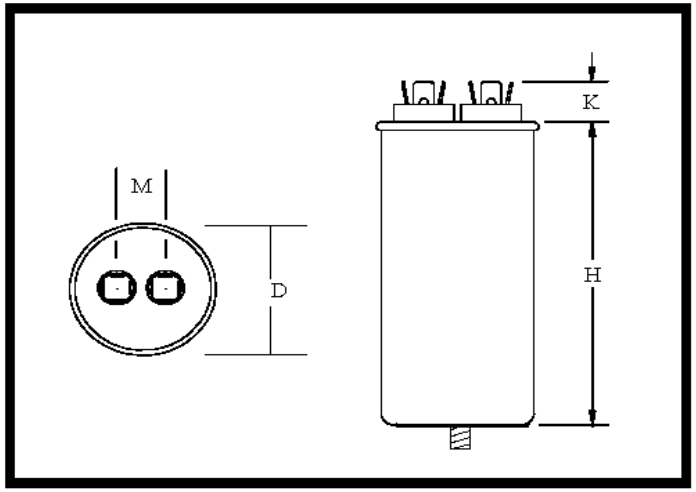

Stamping

Wuxi - Motor Cap
CBB65-250R856-M8
85uF 5% 250 VAC
-40 - +85 C. 50/60 Hz.

Protected 10,000 AFC

Non PCB **ЯU** **cЯU** **Date Code** **RoHS**

M8 Bottom Mounting Stud
Supplied with nuts and washers

Approved: *J D Aldana*
Date **May 18, 2015**