


Part Number	<b>CBB65-370R0535A</b>	Revision	A
Customer P/N	<b>100335-05</b>	Revision	A
Capacitance	<b>35 + 5</b>	uF.	Tolerance <b>5%</b>
Voltage	<b>370</b>	VAC	
Dielectric	<b>Metallized Polypropylene</b>		
Terminal Type	<b>.250" Quad-Spade Quick Connect Terminals</b>		
Operating Temperature	<b>-40 oC.-</b>	<b>85 °C.</b>	
Dissipation Factor	<b>0.001</b>	maximum @ 60 Hz.	

# MOTOR Capacitors, Inc.

**Motor Capacitors, Inc.**  
 335 Beinoris Drive  
 Wood Dale, Illinois 60191  
 773-774-6666 (Phone) | 773-774-6690 (Fax)  
[www.capacitorindustries.com](http://www.capacitorindustries.com)  
[info@capacitorindustries.com](mailto:info@capacitorindustries.com)

	Dimension	Tolerance
Case Diameter (D)	<b>1.97/2.07</b>	<b>0.06</b>
Case Height (H)	<b>3.88</b>	<b>0.06</b>
Terminal Height (K)	<b>0.50</b>	<b>ref.</b>
Terminal-Terminal (M)	<b>0.81</b>	<b>ref.</b>
Insulating Cup (dia.)	<b>0.70</b>	

*Dimensions in inches*

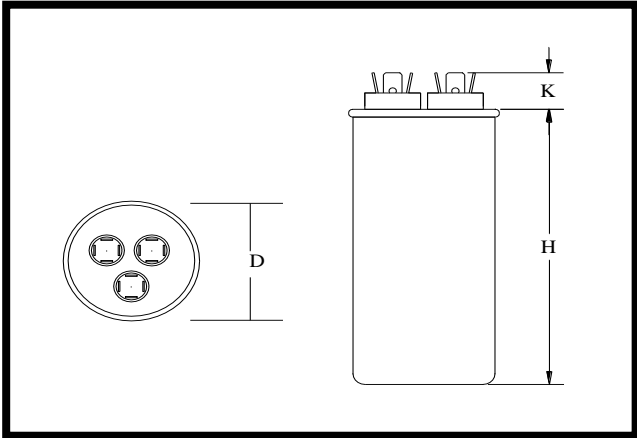

Stamping

**Anhui - Motor Cap**  
**CBB65-370R0535A**  
**35+5uF 5% 370 VAC**  
**-40 - +85 C. 50/60 Hz.**  
**100335-05**

**Protected 10,000 AFC**

**Non PCB    ЯU    сЯU    Date Code    RoHS    VDE**

**6 Micron Metalized Film**  
**Terminals: Herm (Red-3), Fan (White-1), Common (Black-4)**  
**Also requires A Data Matrix Symbol**

Approval: *J. D. Aldana*  
 Date: February 26, 2016