

Part Number	CBB65-370R0545-A1	Revision	A
Customer P/N	100335-43	Revision	A
Capacitance	45 + 5	uF.	Tolerance 5%
Voltage	370	VAC	
Dielectric	Metallized Polypropylene		
Terminal Type	.250" Quad-Spade Quick Connect Terminals		
Operating Temperature	-40 oC.-	85 °C.	
Dissipation Factor	0.001	maximum @ 60 Hz.	

MOTOR Capacitors, Inc.

Motor Capacitors, Inc.

335 Beinoris Drive

Wood Dale, Illinois 60191


773-774-6666 (Phone) | 773-774-6690 (Fax)


www.capacitorindustries.com

info@capacitorindustries.com

	Dimension	Tolerance
Case Diameter (D)	2.50	0.06
Case Height (H)	3.58	0.06
Terminal Height (K)	0.50	ref.
Terminal-Terminal (M)	0.81	ref.
Insulating Cup (dia.)	0.70	

Dimensions in inches

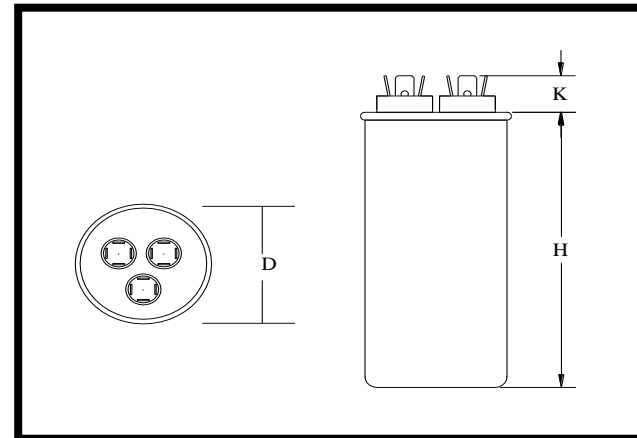

Stamping	
Anhui - Motor Cap CBB65-370R0545-A1 45+5uF 5% 370 VAC -40 - +85 C. 50/60 Hz. 100335-43 Protected 10,000 AFC	
	
Non PCB	RU cRU Date Code RoHS VDE

6 Micron Metalized Film
Terminals: Herm (Red-3), Fan (White-1), Common (Black-4)
Also requires A Data Matrix Symbol

Approval: *J.D Aldana*

Date: **February 26, 2016**