

Part Number	<b>CBB65-370R07E70A</b>	Revision	<b>A</b>
Customer P/N	<b>100335-20</b>	Revision	<b>A</b>
Capacitance	<b>70 + 7.5</b>	uF.	Tolerance <b>5%</b>
Voltage	<b>370</b>	VAC	
Dielectric	<b>Metallized Polypropylene</b>		
Terminal Type	<b>.250" Quad-Spade Quick Connect Terminals</b>		
Operating Temperature	<b>-40 oC.-</b>	<b>85 °C.</b>	
Dissipation Factor	<b>0.001</b>	maximum @ 60 Hz.	

# MOTOR Capacitors, Inc.

**Motor Capacitors, Inc.**

**335 Beinoris Drive**

**Wood Dale, Illinois 60191**


**773-774-6666 (Phone) | 773-774-6690 (Fax)**

[www.capacitorindustries.com](http://www.capacitorindustries.com)

[info@capacitorindustries.com](mailto:info@capacitorindustries.com)

	Dimension	Tolerance
Case Diameter (D)	<b>2.50</b>	<b>0.06</b>
Case Height (H)	<b>4.75</b>	<b>0.06</b>
Terminal Height (K)	<b>0.50</b>	<b>ref.</b>
Terminal-Terminal (M)	<b>0.81</b>	<b>ref.</b>
Insulating Cup (dia.)	<b>0.70</b>	


*Dimensions in inches*

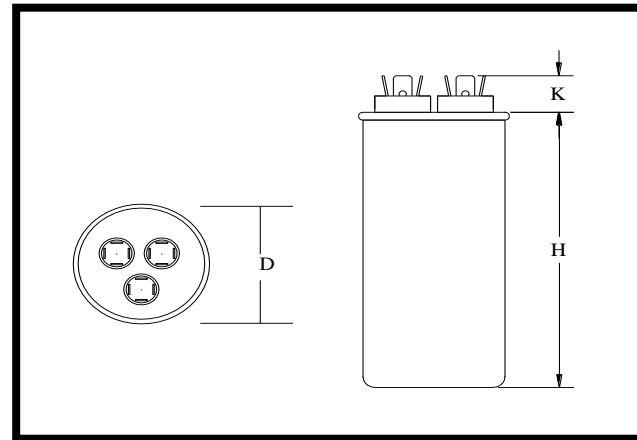

Stamping

**Anhui - Motor Cap**  
**CBB65-370R07E70A**  
**70+7.5uF 5% 370 VAC**  
**-40 - +85 C. 50/60 Hz.**  
**100335-20**  
**Protected 10,000 AFC**

**Non PCB**    **RU**    **cRU**    **Date Code**    **RoHS**    **VDE**



**7 Micron Metallized Film**  
**Terminals: Herm (Red-3), Fan (White-1), Common (Black-4)**  
**Also requires A Data Matrix Symbol**

Approval: *J.D Aldana*

Date: **February 26, 2016**