


Part Number	CBB65-370R1255		Revision
Customer P/N			Revision
Capacitance	12.5	uF.	Tolerance 5.0%
Voltage	370	VAC	
Dielectric	Metallized Polypropylene		
Terminal Type	.250" Quad-Spade Quick Connect Terminals		
Operating Temperature	-40 °C.-		85 °C.
Dissipation Factor	0.001	maximum	@ 60 Hz.

MOTOR Capacitors, Inc.

Motor Capacitors, Inc.
 335 Beinoris Drive
 Wood Dale, Illinois 60191
 773-774-6666 (Phone) | 773-774-6690 (Fax)
www.capacitorindustries.com
info@capacitorindustries.com

	Dimension	Tolerance
Diameter (D) Case/Cover	1.57/1.67	0.06
Case Height (H)	2.56	0.06
Terminal Height (K)	0.56	ref.
Terminal-Terminal (M)	0.61	ref.
Insulating Cup (dia.)	0.61	ref.

Dimensions in inches

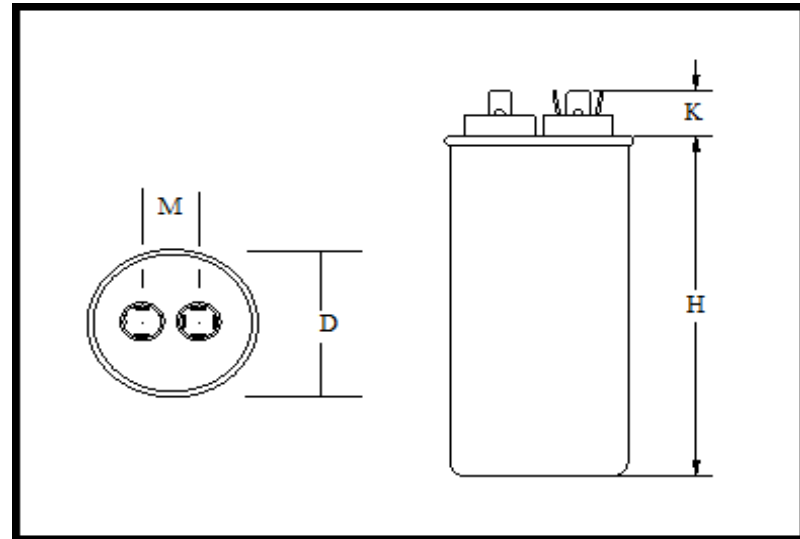


Stamping

Wuxi - Motor Cap
CBB65-370R1255
 12.5uF 5% 370 VAC
 -40 - +85 C. 50/60 Hz.

Protected 10,000 AFC

Non PCB RU cRU Date Code RoHS



Approval : *J. D. Aldana*
 Date : July 15, 2004