

Part Number	CBB65-370R1555		Revision	
Customer P/N	3314471.017MC		Revision	
Capacitance	55 + 15	uF.	Tolerance	5%
Voltage	370	VAC		
Dielectric	Metallized Polypropylene			
Terminal Type	.250" Quad-Spade Quick Connect Terminals			
Operating Temperature	-40 oC.-	70 °C.		
Dissipation Factor	0.001	maximum	@ 60 Hz.	

MOTOR Capacitors, Inc.

Motor Capacitors, Inc.

335 Beinoris Drive


Wood Dale, Illinois 60191

773-774-6666 (Phone) | 773-774-6690 (Fax)

www.capacitorindustries.com

info@capacitorindustries.com

	Dimension	Tolerance
Case Diameter (D)	2.17/2.27	0.06
Case Height (H)	4.13	0.06
Terminal Height (K)	0.56	ref.
Terminal-Terminal (M)	0.81	ref.
Insulating Cup (dia.)	0.74	
<i>Dimensions in inches</i>		

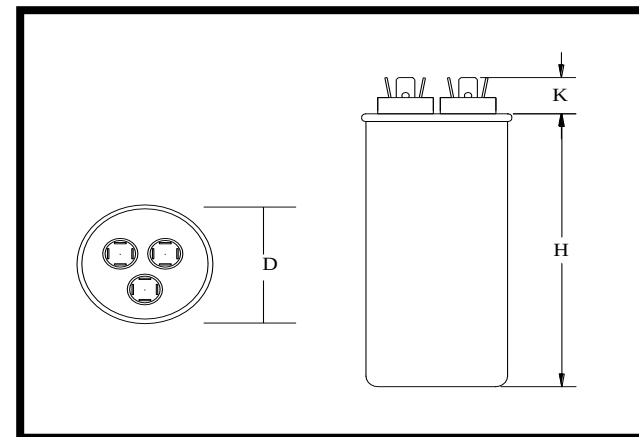

Stamping				
Wuxi - Motor Cap				
CBB65-370R1555				
55 / 15 uF.uF 5% 370 VAC				
-40 - +70 C. 50/60 Hz.				
3314471.017MC				
Protected 10,000 AFC				
Non PCB	YU	cYU	Date Code	RoHS



Approval: *J.D. Aldana*
Date: November 2, 2023