


Part Number	CBB65-370R206-M1	Revision	
Customer P/N	195-200-1007 / 46P005-01NN	Revision	
Capacitance	20	uF.	Tolerance 5.0%
Voltage	370	VAC	
Dielectric	Metallized Polypropylene		
Terminal Type	.250" Quad-Spade Quick Connect Terminals		
Operating Temperature	-40 °C.-	85 °C.	
Dissipation Factor	0.001	maximum @ 60 Hz.	

MOTOR Capacitors, Inc.

Motor Capacitors, Inc.
 335 Beinoris Drive
 Wood Dale, Illinois 60191
 773-774-6666 (Phone) | 773-774-6690 (Fax)
www.capacitorindustries.com
info@capacitorindustries.com


	Dimension	Tolerance
Diameter (D) Case/Cover	1.77/1.87	0.06
Case Height (H)	2.94	0.06
Terminal Height (K)	0.56	ref.
Terminal-Terminal (M)	0.81	ref.
Insulating Cup (dia.)	0.74	

Dimensions in inches

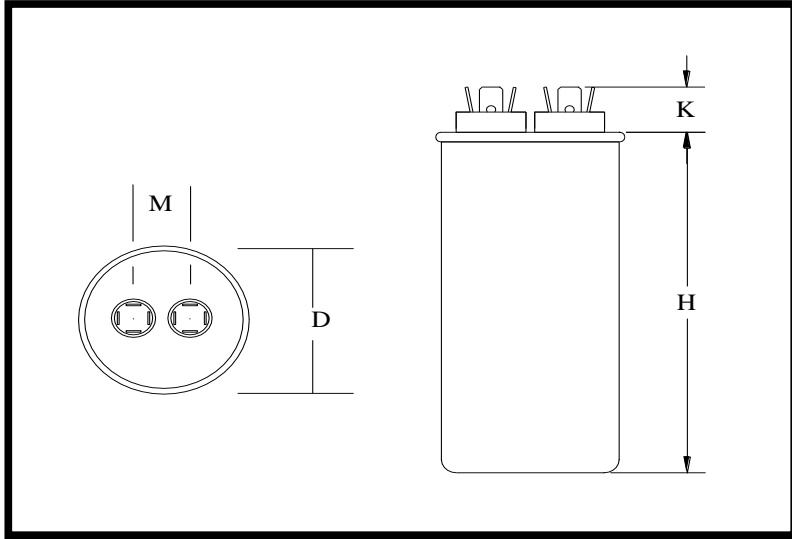

Stamping

**Wuxi - Motor Cap
 CBB65-370R206-M1
 20uF 5% 370 VAC
 -40 - +85 C. 50/60 Hz.
 195-200-1007**

Protected 10,000 AFC 

Non PCB ЯU сЯU Date Code RoHS

Approval : J.D. Aldana
 Date : February 18, 2012