


Part Number	CBB65-370R456-M8	Revision	A
Customer P/N	620314319	Revision	A
Capacitance	45	uF.	Tolerance 5.0%
Voltage	370	VAC	
Dielectric	Metallized Polypropylene		
Terminal Type	Double Spade and Single Spade		
Operating Temperature	-40 °C.-	85 °C.	
Dissipation Factor	0.001	maximum	@ 60 Hz.


MOTOR Capacitors, Inc.

Motor Capacitors, Inc.
 335 Beinoris Drive
 Wood Dale, Illinois 60191
 773-774-6666 (Phone) | 773-774-6690 (Fax)
www.capacitorindustries.com
info@capacitorindustries.com

	Dimension	Tolerance
Diameter (D) Case/Cover	1.76/1.87	0.03
Case Height (H)	3.94	0.06
Terminal Height (K)	0.56	ref.
Terminal-Terminal (M)	0.81	ref.
Insulating Cup (dia.)	0.74	
Bottom Mounting Stud	Yes	

Dimensions in inches

Stamping	Wuxi - Motor Cap		
	CBB65-370R456-M8		
	45uF 5% 370 VAC		
	-40 - +85 C. 50/60 Hz.		
			
	Protected 10,000 AFC		
Non PCB	RU	cRU	Date Code RoHS

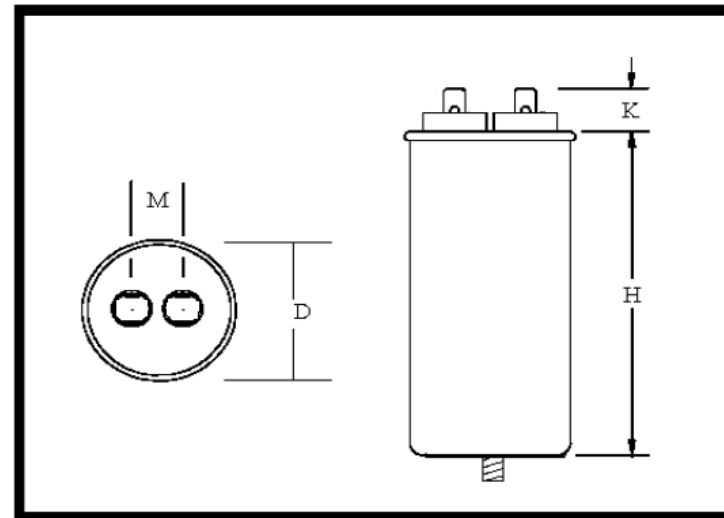

Yellow Dots on side near stamping, Supplied with nuts and washers
NOTE: one terminal has only 2 spades and one terminal has only 1 spade
M8 stud can withstand up to 5 N•m (3.688 ft-lb) torque

Approved: J.D Aldana
 Date August 14, 2018