

Part Number	CBB65-370R606-M1		Revision	M
Customer P/N	1499-576		Revision	
Capacitance	60	uF.	Tolerance	5.0%
Voltage	370	VAC		
Dielectric	Metallized Polypropylene			
Terminal Type	.250" Quad-Spade Quick Connect Terminals			
Operating Temperature	-40 °C.		85 °C.	
Dissipation Factor	0.001	maximum	@ 60 Hz.	

MOTOR Capacitors, Inc.

Motor Capacitors, Inc.

335 Beinoris Drive

Wood Dale, Illinois 60191


773-774-6666 (Phone) | 773-774-6690 (Fax)

www.capacitorindustries.com

info@capacitorindustries.com

	Dimension	Tolerance
Diameter (D) Case/Cover	1.97/2.07	0.06
Case Height (H)	4.92	0.06
Terminal Height (K)	0.56	ref.
Terminal-Terminal (M)	0.81	ref.
Insulating Cup (dia.)	0.74	
<i>Dimensions in inches</i>		

Stamping			
Wuxi - Motor Cap			
CBB65-370R606-M1			
60uF 5% 370 VAC			
-40 - +85 C. 50/60 Hz.			
 1499-576			
Protected 10,000 AFC			
Non PCB	YU	cYU	Date Code RoHS

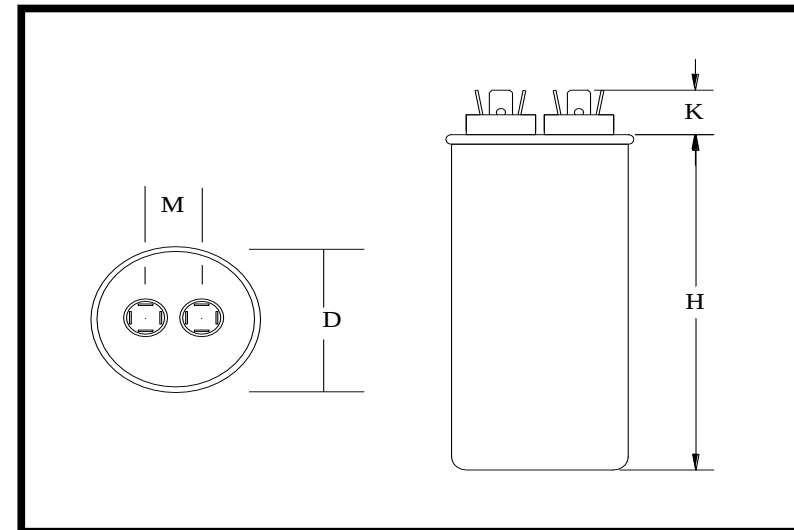

Approval : J.D. Aldana
Date : July 15, 2004