


Part Number	<b>CBB65-370R656</b>	Revision	<b>C</b>
Customer P/N	<b>HC150293 / 18-1902-73</b>	Revision	
Capacitance	<b>65</b>	uF.	Tolerance <b>5.0%</b>
Voltage	<b>370</b>	VAC	
Dielectric	<b>Metallized Polypropylene</b>		
Terminal Type	<b>.250" Quad-Spade Quick Connect Terminals</b>		
Operating Temperature	<b>-25 °C.-</b>	<b>70 °C.</b>	
Dissipation Factor	<b>0.001</b>	maximum	@ 60 Hz.

# MOTOR Capacitors, Inc.

**Motor Capacitors, Inc.**  
**335 Beinoris Drive**  
**Wood Dale, Illinois 60191**  
**773-774-6666 (Phone) | 773-774-6690 (Fax)**  
[www.capacitorindustries.com](http://www.capacitorindustries.com)  
[info@capacitorindustries.com](mailto:info@capacitorindustries.com)


	Dimension	Tolerance
Diameter (D) Case/Cover	<b>2.17/2.27</b>	<b>0.06</b>
Case Height (H)	<b>3.94</b>	<b>0.06</b>
Terminal Height (K)	<b>0.50</b>	<b>max.</b>
Terminal-Terminal (M)	<b>0.81</b>	<b>ref.</b>
Insulating Cup (dia.)	<b>0.74</b>	

*Dimensions in inches*

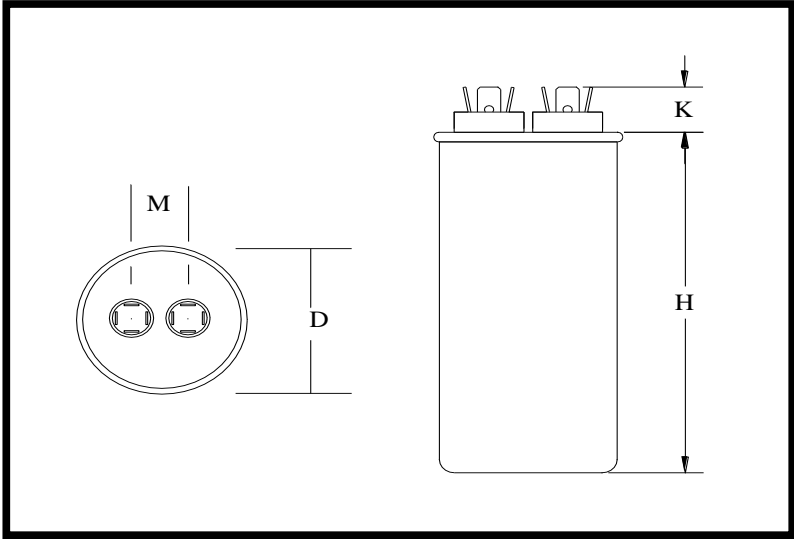

Stamping

**Wuxi - Motor Cap**  
**CBB65-370R656**  
**65uF 5% 370 VAC**  
**-25 - +70 C. 50/60 Hz.**  
**HC150293 / 18-1902-73**

**S2 Protected 10,000 AFC Non-PCB**  **US**  
**RU cRU Date Code RoHS CE VDE**

Capacitor must be stamped with 18-1902-73 Bar Code

Approval : *J.D. Aldana*  
Date : **November 7, 2016**