

Part Number	CBB65-370R706A	Revision	B
Customer P/N		Revision	B
Capacitance	70	uF.	Tolerance 5.0%
Voltage	370	VAC	
Dielectric	Metallized Polypropylene		
Terminal Type	.250" Quad-Spade Quick Connect Terminals		
Operating Temperature	-25 °C.-	85 °C.	
Dissipation Factor	0.001	maximum @ 60 Hz.	

MOTOR Capacitors, Inc.

Motor Capacitors, Inc.
335 Beinoris Drive
Wood Dale, Illinois 60191
773-774-6666 (Phone) | 773-774-6690 (Fax)
www.capacitorindustries.com
info@capacitorindustries.com

	Dimension	Tolerance
Diameter (D) Case/Cover	1.97/2.07	0.04
Case Height (H)	4.72	0.12
Terminal Height (K)	0.56	ref.
Terminal-Terminal (M)	0.81	ref.
Insulating Cup (dia.)	0.74	ref.


Dimensions in inches

Stamping

Anhui - Motor Cap
CBB65-370R706A
70uF 5% 370 VAC
-25 - +85 C. 50/60 Hz.
C22.2 No. 190-M1985 AMB46C

Protected 10,000 AFC

Non PCB RU cRU Date Code RoHS

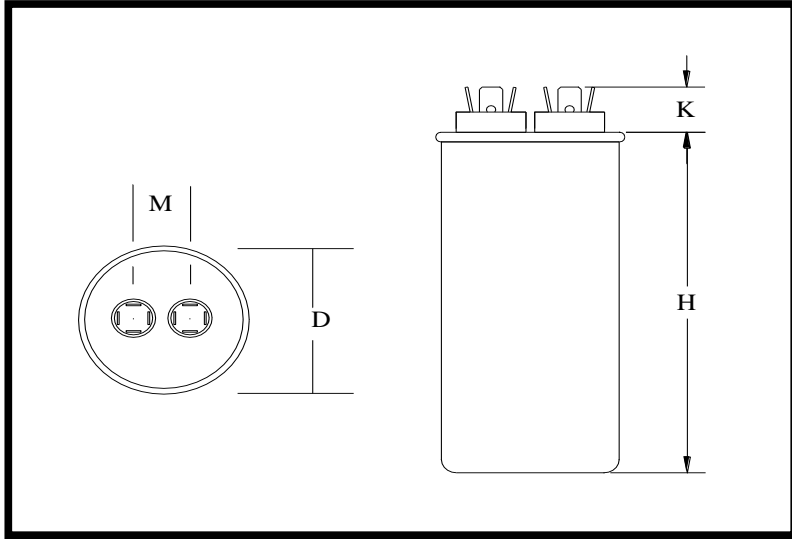

Approval : _____ J. D. Aldana _____
Date : _____ March 18, 2016 _____