


Part Number	CBB65-370R806-M1		Revision	
Customer P/N			Revision	
Capacitance	80	uF.	Tolerance	5.0%
Voltage	370	VAC		
Dielectric	Metallized Polypropylene			
Terminal Type	.250" Quad-Spade Quick Connect Terminals			
Operating Temperature	-40 °C.-		85 °C.	
Dissipation Factor	0.001	maximum	@ 60 Hz.	


MOTOR Capacitors, Inc.

Motor Capacitors, Inc.
335 Beinoris Drive
Wood Dale, Illinois 60191
773-774-6666 (Phone) | 773-774-6690 (Fax)
www.capacitorindustries.com
info@capacitorindustries.com

	Dimension	Tolerance
Diameter (D) Case/Cover	1.97/2.07	0.06
Case Height (H)	4.75	0.06
Terminal Height (K)	0.56	ref.
Terminal-Terminal (M)	0.81	ref.
Insulating Cup (dia.)	0.74	

Dimensions in inches

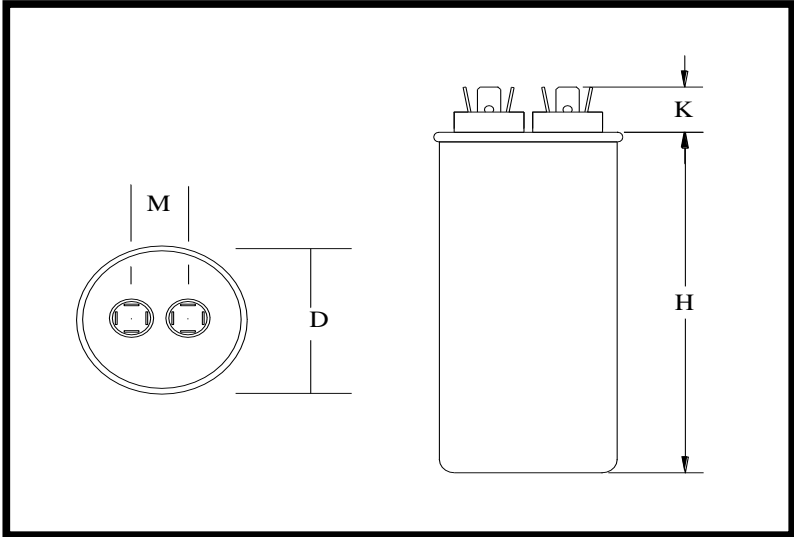

Stamping	Wuxi - Motor Cap			
	CBB65-370R806-M1			
	80uF 5% 370 VAC			
	-40 - +85 C. 50/60 Hz.			
	Protected 10,000 AFC			
	Non PCB	RU	cRU	Date Code RoHS

Capacitor must be Bar Coded with MCI P/N Bar Code

Approval : *J.D. Aldana*
Date : **August 23, 2006**