

Part Number	CBB65-370R806R		Revision	
Customer P/N			Revision	
Capacitance	80	uF.	Tolerance	5.0%
Voltage	370	VAC		
Dielectric	Metallized Polypropylene			
Terminal Type	.250" Quad-Spade Quick Connect Terminals			
Operating Temperature	-40 oC.-		85 °C.	
Dissipation Factor	0.001	maximum	@ 60 Hz.	

MOTOR Capacitors, Inc.

Motor Capacitors, Inc.

335 Beinoris Drive

Wood Dale, Illinois 60191



773-774-6666 (Phone) | 773-774-6690 (Fax)

www.capacitorindustries.com

info@capacitorindustries.com

	Dimension	Tolerance
Diameter (D) Case/Cover	1.97/2.07	0.06
Case Height (H)	4.92	0.06
Terminal Height (K)	0.56	ref.
Terminal-Terminal (M)	0.81	ref.
Insulating Cup (dia.)	0.74	

Dimensions in inches

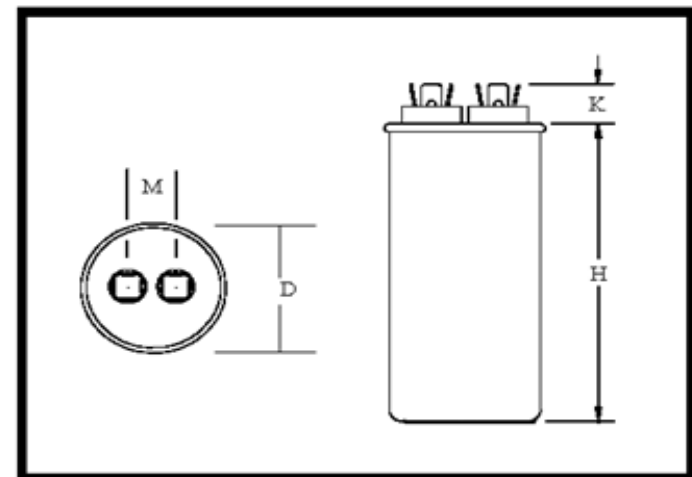

Stamping	
Wuxi - Motor Cap	
CBB65-370R806R	
80uF 5% 370 VAC	
-40 - +85 C. 50/60 Hz.	
Protected 10,000 AFC CE	
Non PCB RU cRU Date Code RoHS	



External Resistor - 220k Ohm, 2 watt,

Engineer JD Aldana
Date July 8, 2013