Part Number	**CBB65-440R0540A**		Revision	A
Customer P/N	**100335-09**		Revision	**A**
Capacitance	**40 + 5**	uF.	Tolerance	**5%**
Voltage	**440**	VAC		
Dielectric	**Metallized Polypropylene**			
Terminal Type	**.250" Quad-Spade Quick Connect Terminals**			
Operating Temperature	**-40** oC.-	**85** ºC.		
Dissipation Factor	**0.001**	maximum @ 60 Hz.		

MOTOR
Capacitors, Inc.

Motor Capacitors, Inc.
335 Beinoris Drive
Wood Dale, Illinois 60191
773-774-6666 (Phone) | 773-774-6690 (Fax)
www.capacitorindustries.com
info@capacitorindustries.com

	Dimension	Tolerance
Case Diameter (D)	**2.50**	**0.06**
Case Height (H)	**3.88**	**0.06**
Terminal Height (K)	**0.50**	**ref.**
Terminal-Terminal (M)	**0.81**	**ref.**
Insulating Cup (dia.)	**0.70**	

Dimensions in inches

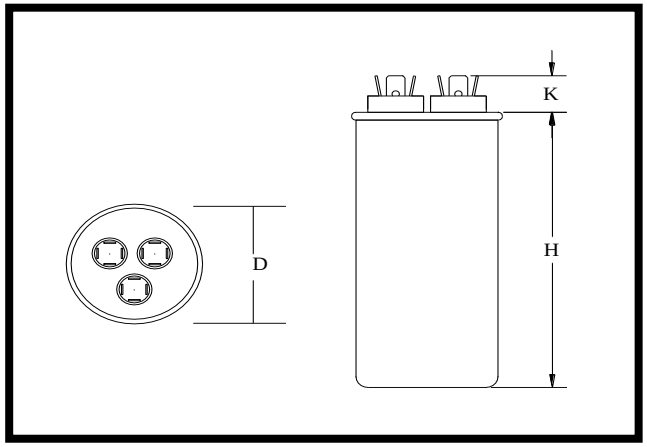

Stamping

Anhui - Motor Cap
CBB65-440R0540A
40+5uF 5% 440 VAC
-40 - +85 C. 50/60 Hz.
100335-09
Protected 10,000 AFC
Non PCB ЯU cЯU Date Code RoHS VDE

7 Micron Metalized Film
Terminals: Herm (Red-3), Fan (White-1), Common (Black-4)
Also requires A Data Matrix Symbol

Approval: *J.D Aldana*
Date: **February 26, 2016**