


Part Number	CBB65-440R07E50R	Revision	
Customer P/N	470146	Revision	
Capacitance	50 + 7.5	uF.	Tolerance 5%
Voltage	440	VAC	
Dielectric	Metallized Polypropylene		
Terminal Type	.250" Quad-Spade Quick Connect Terminals		
Operating Temperature	-40 oC.-	85 °C.	
Dissipation Factor	0.001	maximum	@ 60 Hz.

MOTOR Capacitors, Inc.

Motor Capacitors, Inc.
 335 Beinoris Drive
 Wood Dale, Illinois 60191
 773-774-6666 (Phone) | 773-774-6690 (Fax)
www.capacitorindustries.com
info@capacitorindustries.com

	Dimension	Tolerance
Case Diameter (D)	2.17/2.27	0.06
Case Height (H)	5.72	0.06
Terminal Height (K)	0.56	ref.
Terminal-Terminal (M)	0.81	ref.
Insulating Cup (dia.)	0.61	

Dimensions in inches

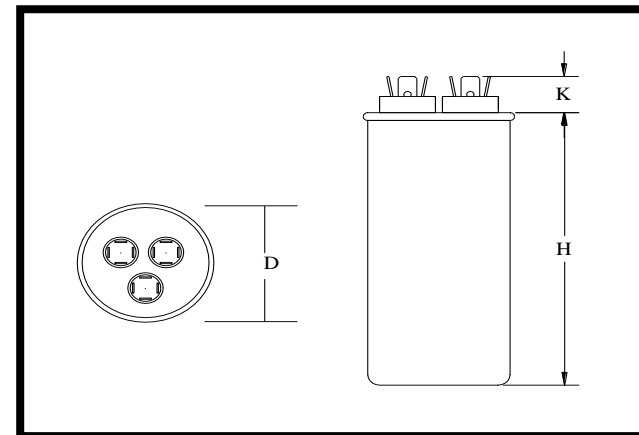

Stamping	Wuxi - Motor Cap			
	CBB65-440R07E50R			
	50/7.5uF 5% 440 VAC			
	-40 - +85 C. 50/60 Hz.			
	220kOhm 2W			
	Protected 10,000 AFC			
Non PCB	RU	cRU	Date Code	RoHS



220 Kohm 2-watt Internal Bleeder Resistor across 50 uF. winding

Approval: *J.D Aldana*
 Date: March 21, 2005