

MOTOR Capacitors, Inc.

Motor Capacitors, Inc.

335 Beinoris Drive

Wood Dale, Illinois 60191

773-774-6666 (Phone) | 773-774-6690 (Fax)


www.capacitorindustries.com

info@capacitorindustries.com

Part Number	CBB65-440R1050A		Revision	A
Customer P/N	100335-21		Revision	A
Capacitance	50 + 10	uF.	Tolerance	5%
Voltage	440	VAC		
Dielectric	Metallized Polypropylene			
Terminal Type	.250" Quad-Spade Quick Connect Terminals			
Operating Temperature	-40 °C.-	85 °C.		
Dissipation Factor	0.001	maximum	@ 60 Hz.	

	Dimension	Tolerance
Case Diameter (D)	2.50	0.06
Case Height (H)	4.75	0.06
Terminal Height (K)	0.50	ref.
Terminal-Terminal (M)	0.81	ref.
Insulating Cup (dia.)	0.70	

Dimensions in inches

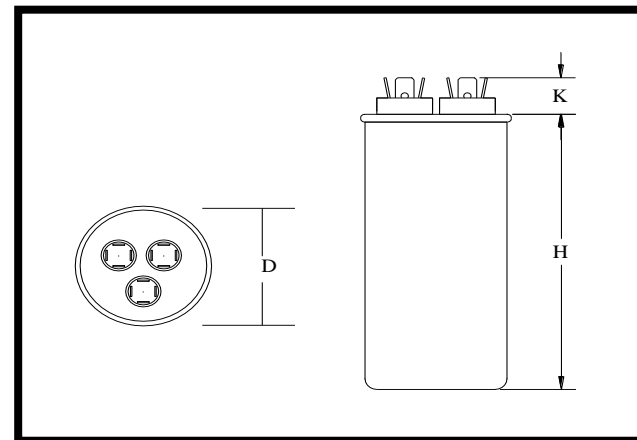

Stamping

Anhui - Motor Cap
CBB65-440R1050A
50+10uF 5% 440 VAC
-40 - +85 C. 50/60 Hz.
100335-21
Protected 10,000 AFC

Non PCB R U cRU Date Code RoHS VDE

cRU[®] US

8 Micron Metalized Film
Terminals: Herm (Red-3), Fan (White-1), Common (Black-4)
Also requires A Data Matrix Symbol

Approval: *J.D Aldana*

Date: **February 26, 2016**