

Part Number	<b>CBB65-440R156-M1R</b>	Revision	
Customer P/N	<b>18-1902-30</b>	Revision	
Capacitance	<b>15</b>	uF.	Tolerance <b>5.0%</b>
Voltage	<b>440</b>	VAC	
Dielectric	<b>Metallized Polypropylene</b>		
Terminal Type	<b>Quad-Spade Quick Connect Terminals</b>		
Operating Temperature	<b>-25 oC.-</b>	<b>70 °C.</b>	
Dissipation Factor	<b>0.001</b>	maximum	@ 60 Hz.

# MOTOR Capacitors, Inc.

Motor Capacitors, Inc.

335 Beinoris Drive

Wood Dale, Illinois 60191



773-774-6666 (Phone) | 773-774-6690 (Fax)

[www.capacitorindustries.com](http://www.capacitorindustries.com)

[info@capacitorindustries.com](mailto:info@capacitorindustries.com)

	Dimension	Tolerance
Diameter (D) Case/Cover	<b>1.77/1.87</b>	<b>0.06</b>
Case Height (H)	<b>3.75</b>	<b>0.06</b>
Terminal Height (K)	<b>0.56</b>	ref.
Terminal-Terminal (M)	<b>0.81</b>	ref.
Insulating Cup (dia.)	<b>0.74</b>	ref.


*Dimensions in inches*

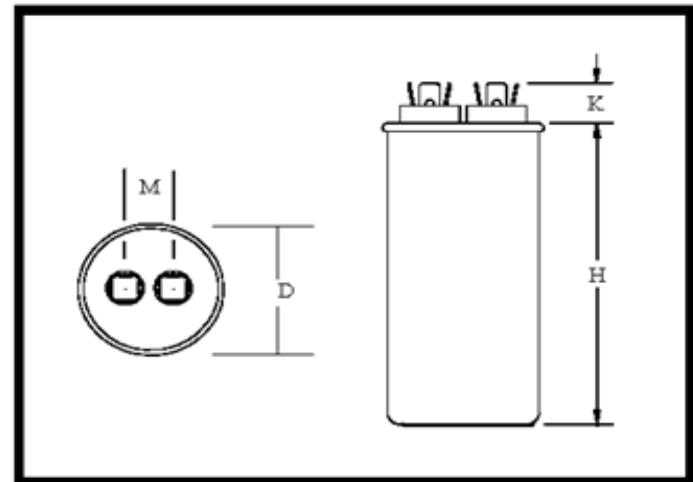

Stamping

**Wuxi - Motor Cap**  
**CBB65-440R156-M1R**  
**15uF 5% 440 VAC**  
**-25 - +70 C. 50/60 Hz.**  
**18-1902-30**

**Protected 10,000 AFC**    **CE**    **VDE**  
**Non PCB**    **RU**    **cRU**    **Date Code**    **RoHS**



**Capacitor must be stamped with Customer's P/N Bar Code**  
**220 KOhm Discharge Resistor Attached**

Engineer JD Aldana  
Date April 12, 2018