


Part Number	CBB65-440R176A	Revision	B
Customer P/N		Revision	B
Capacitance	17	uF.	Tolerance 5.0%
Voltage	440	VAC	
Dielectric	Metallized Polypropylene		
Terminal Type	.250" Quad-Spade Quick Connect Terminals		
Operating Temperature	-25 °C.-	85 °C.	
Dissipation Factor	0.001	maximum	@ 60 Hz.

MOTOR Capacitors, Inc.

Motor Capacitors, Inc.
 335 Beinoris Drive
 Wood Dale, Illinois 60191
 773-774-6666 (Phone) | 773-774-6690 (Fax)
www.capacitorindustries.com
info@capacitorindustries.com


	Dimension	Tolerance
Diameter (D) Case/Cover	1.97/2.07	0.06
Case Height (H)	2.95	0.06
Terminal Height (K)	0.56	ref.
Terminal-Terminal (M)	0.81	ref.
Insulating Cup (dia.)	0.74	ref.

Dimensions in inches

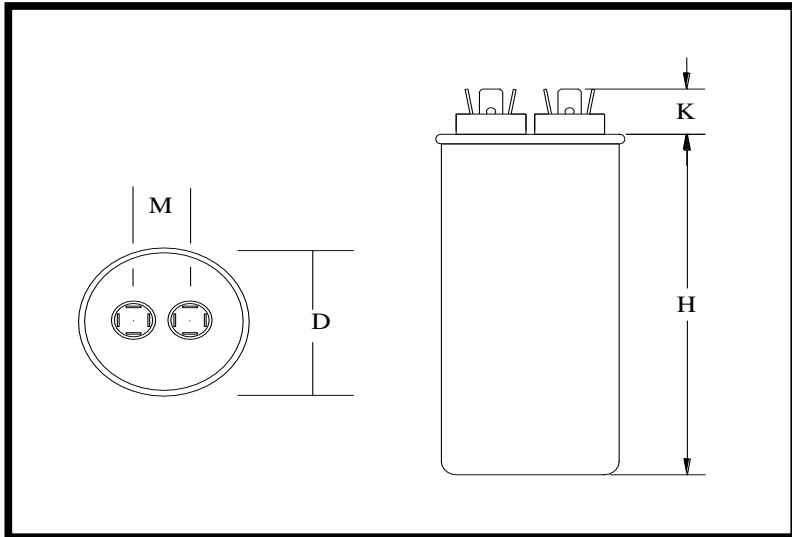

Stamping

Anhui - Motor Cap
CBB65-440R176A
17uF 5% 440 VAC
-25 - +85 C. 50/60 Hz.
C22.2 No. 190-M1985 AMB46C

Protected 10,000 AFC 

Non PCB RU cRU Date Code RoHS

Approval : J.D. Aldana
 Date : March 18, 2016