


Part Number	CBB65-440R206-M4	Revision	A
Customer P/N	HC151463	Revision	A
Capacitance	20	uF.	Tolerance 5.0%
Voltage	440	VAC	
Dielectric	Metallized Polypropylene		
Terminal Type	.250" Quad-Spade Quick Connect Terminals		
Operating Temperature	-25 °C.-	70 °C.	
Dissipation Factor	0.001	maximum	@ 60 Hz.

MOTOR Capacitors, Inc.

Motor Capacitors, Inc.
335 Beinoris Drive
Wood Dale, Illinois 60191
773-774-6666 (Phone) | 773-774-6690 (Fax)
www.capacitorindustries.com
info@capacitorindustries.com


	Dimension	Tolerance
Diameter (D) Case/Cover	1.77/1.87	0.03
Case Height (H)	2.99	0.03
Terminal Height (K)	0.56	ref.
Terminal-Terminal (M)	0.81	ref.
Insulating Cup (dia.)	0.74	

Dimensions in inches

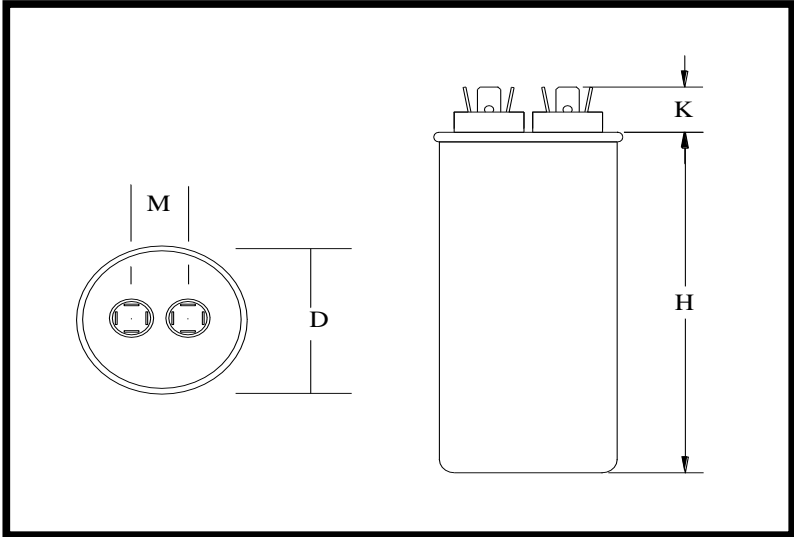

Stamping

Wuxi - Motor Cap
CBB65-440R206-M4
20uF 5% 440 VAC
-25 - +70 C. 50/60 Hz.
HC151463

P2 Protected 10,000 AFC Non-PCB  **US**
RU cRU Date Code RoHS CE VDE



Approval : *J.D. Aldana*
Date : April 18, 2016