


| | | | |
|-----------------------|---|---------------|-----------------------|
| Part Number | CBB65-440R256 | Revision | |
| Customer P/N | PCAP25/440 | Revision | |
| Capacitance | 25 | uF. | Tolerance 5.0% |
| Voltage | 440 | VAC | |
| Dielectric | Metallized Polypropylene | | |
| Terminal Type | .250" Quad-Spade Quick Connect Terminals | | |
| Operating Temperature | -40 °C.- | 85 °C. | |
| Dissipation Factor | 0.001 | maximum | @ 60 Hz. |

MOTOR Capacitors, Inc.

Motor Capacitors, Inc.
 335 Beinoris Drive
 Wood Dale, Illinois 60191
 773-774-6666 (Phone) | 773-774-6690 (Fax)
www.capacitorindustries.com
info@capacitorindustries.com

| | Dimension | Tolerance |
|-------------------------|------------------|-------------|
| Diameter (D) Case/Cover | 1.77/1.87 | 0.06 |
| Case Height (H) | 3.94 | 0.06 |
| Terminal Height (K) | 0.56 | ref. |
| Terminal-Terminal (M) | 0.81 | ref. |
| Insulating Cup (dia.) | 0.74 | |

Dimensions in inches

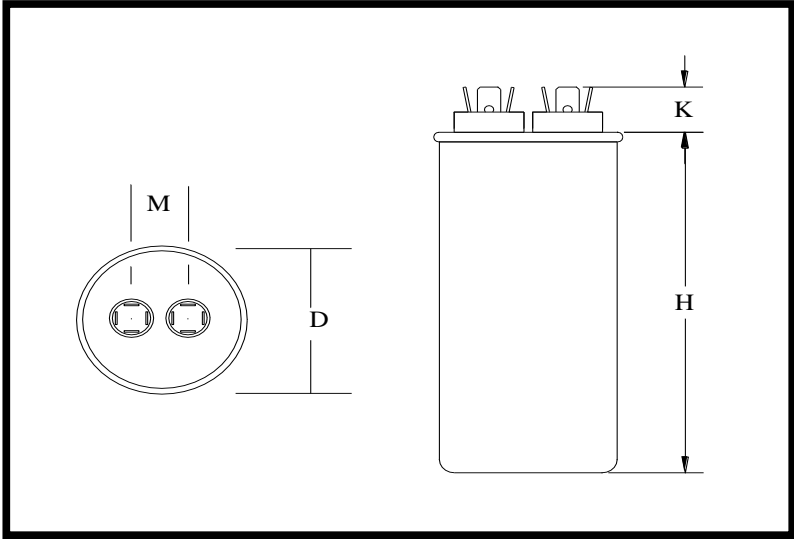

Stamping

Wuxi - Motor Cap
CBB65-440R256
25uF 5% 440 VAC
-40 - +85 C. 50/60 Hz.

Protected 10,000 AFC

Non PCB RU cRU Date Code RoHS

UL[®]
cRU US



Approval : J.D. Aldana
 Date : April 30, 2003