


Part Number	CBB65-440R356-M1	Revision	
Customer P/N	18-1902-64 9181009-25	Revision	
Capacitance	35	uF.	Tolerance 5.0%
Voltage	440	VAC	
Dielectric	Metallized Polypropylene		
Terminal Type	.250" Quad-Spade Quick Connect Terminals		
Operating Temperature	-25 °C.-	70 °C.	
Dissipation Factor	0.001	maximum	@ 60 Hz.

MOTOR Capacitors, Inc.

Motor Capacitors, Inc.
335 Beinoris Drive
Wood Dale, Illinois 60191
773-774-6666 (Phone) | 773-774-6690 (Fax)
www.capacitorindustries.com
info@capacitorindustries.com

	Dimension	Tolerance
Diameter (D) Case/Cover	1.97/2.07	0.06
Case Height (H)	3.88	max.
Terminal Height (K)	0.56	ref.
Terminal-Terminal (M)	0.81	ref.
Insulating Cup (dia.)	0.74	

Dimensions in inches

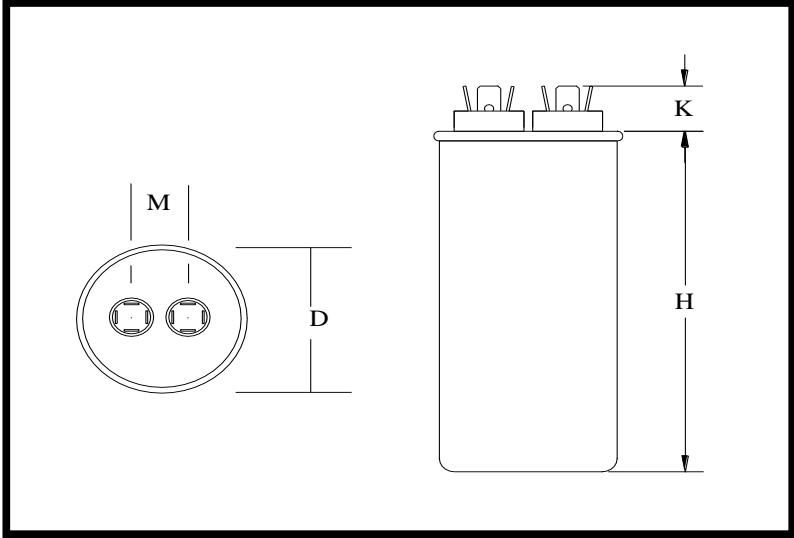

Stamping

Wuxi - Motor Cap
CBB65-440R356-M1
35uF 5% 440 VAC
-25 - +70 C. 50/60 Hz.
18-1902-64 9181009-25

Protected 10,000 AFC CE VDE cRU[®] US
Non PCB RU cRU Date Code RoHS

Capacitor must be stamped with Customer's P/N Bar Code
Capacitor must be stamped with VDE and CE Approvals.

Approval : *J.D. Aldana*
Date : August 28, 2011