


Part Number	CBB65-440R405-M1		Revision
Customer P/N			Revision
Capacitance	4	uF.	Tolerance 5.0%
Voltage	440	VAC	
Dielectric	Metallized Polypropylene		
Terminal Type	.250" Quad-Spade Quick Connect Terminals		
Operating Temperature	-40 °C.-		85 °C.
Dissipation Factor	0.001	maximum	@ 60 Hz.

MOTOR Capacitors, Inc.

Motor Capacitors, Inc.
335 Beinoris Drive
Wood Dale, Illinois 60191
773-774-6666 (Phone) | 773-774-6690 (Fax)
www.capacitorindustries.com
info@capacitorindustries.com

	Dimension	Tolerance
Diameter (D) Case/Cover	1.772	0.06
OVERALL Height (H)	2.63	0.06
Terminal Height (K)	0.56	ref.
Terminal-Terminal (M)	0.81	ref.
Insulating Cup (dia.)	0.74	ref.

Dimensions in inches

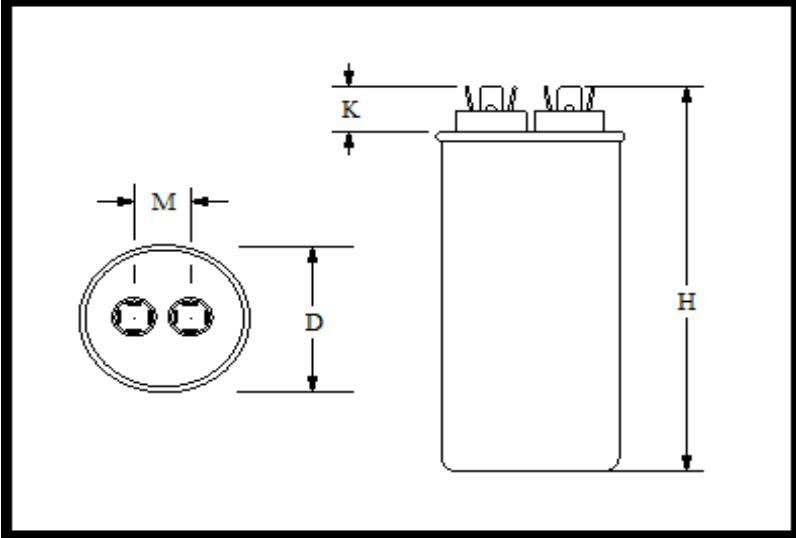

Stamping

Wuxi - Motor Cap
CBB65-440R405-M1
4uF 5% 440 VAC
-40 - +85 C. 50/60 Hz.

Protected 10,000 AFC

Non PCB RU cRU Date Code RoHS

RU US

Approval : J.D. Aldana
Date : **September 5, 2014**