


Part Number	CBB65-440R786	Revision	C
Customer P/N	OG5958B	Revision	
Capacitance	78	uF.	Tolerance 5.0%
Voltage	440	VAC	
Dielectric	Metallized Polypropylene		
Terminal Type	.250" Quad-Spade Quick Connect Terminals		
Operating Temperature	-40 °C.-	85 °C.	
Dissipation Factor	0.001	maximum	@ 60 Hz.


MOTOR Capacitors, Inc.

Motor Capacitors, Inc.
 335 Beinoris Drive
 Wood Dale, Illinois 60191
 773-774-6666 (Phone) | 773-774-6690 (Fax)
www.capacitorindustries.com
info@capacitorindustries.com

	Dimension	Tolerance
Diameter (D) Case/Cover	2.48	0.06
Case Height (H)	4.93	0.06
Terminal Height (K)	0.56	ref.
Terminal-Terminal (M)	0.81	ref.
Insulating Cup (dia.)	0.74	

Dimensions in inches

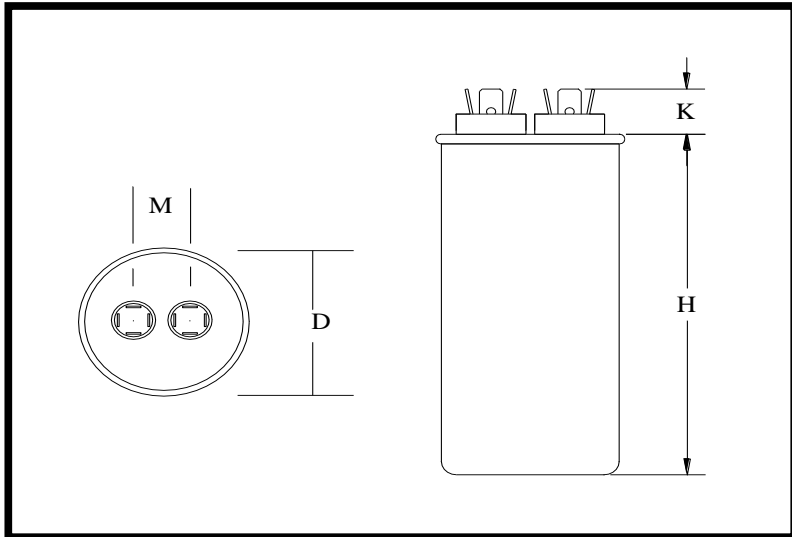

Stamping	<p>Wuxi - Motor Cap CBB65-440R786 78uF 5% 440 VAC -40 +85 C. 50/60 Hz. OG5958B</p> <p>Protected 10,000 AFC</p> <p>Non PCB RU cRU Date Code RoHS</p>	
----------	--	---

Use 7.5 um Heavy Gauge Film ~ Apply Extra Thick Internal End Spray

Approval : J.D. Aldana
 Date : January 15, 2008