


Part Number	CBB65-450R805-M1		Revision
Customer P/N			Revision
Capacitance	8	uF.	Tolerance 5.0%
Voltage	450	VAC	
Dielectric	Metallized Polypropylene		
Terminal Type	Dual .250" X .03" Quick Connect Terminals		
Operating Temperature	-40 °C.-		70 °C.
Dissipation Factor	0.001	maximum	@ 60 Hz.

MOTOR Capacitors, Inc.

Motor Capacitors, Inc.
 335 Beinoris Drive
 Wood Dale, Illinois 60191
 773-774-6666 (Phone) | 773-774-6690 (Fax)
www.capacitorindustries.com
info@capacitorindustries.com

	Dimension	Tolerance
Diameter (D) Case/Cover	1.57	0.03
Case Height (H)	2.16	0.06
Terminal Height (K)	0.56	ref.
Terminal-Terminal (M)	0.81	ref.
Insulating Cup (dia.)	0.74	ref.

Dimensions in inches

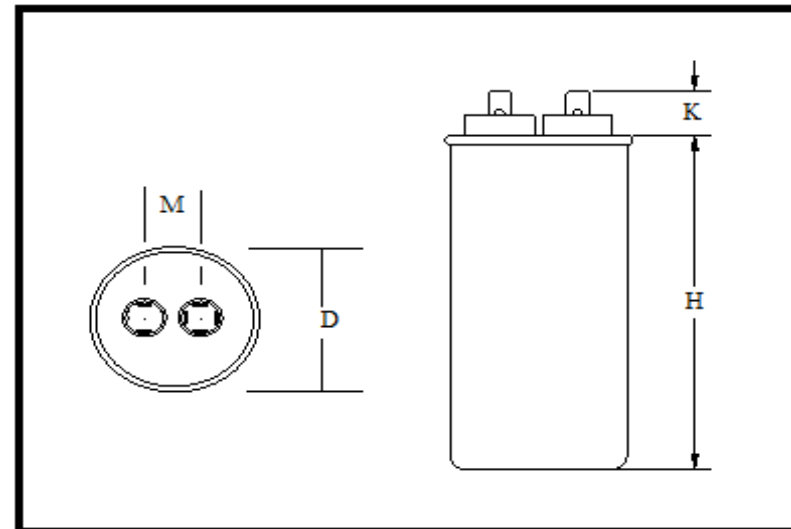

Stamping

Motor Capacitors
CBB65-450R805-M1
8 uF 5% 450 VAC
-40 - +70 C. 50/60 Hz.

RU US

Protected 10,000 AFC
Non PCB RU Date Code RoHs VDE

Approval : *J.D. Aldana*
 Date : **March 26, 2020**