Part Number	**CBB65-660R236**		Revision	**A**
Customer P/N			Revision	**A**
Capacitance	**23.5**	uF.	Tolerance	**5.0%**
Voltage	**660**	VAC		
Dielectric	**Metallized Polypropylene**			
Terminal Type	**.250" Quad-Spade Quick Connect Terminals**			
Operating Temperature	**-25** °C.-	**85** ºC.		
Dissipation Factor	**0.001**	maximum @ 60 Hz.		

MOTOR Capacitors, Inc.

Motor Capacitors, Inc.
335 Beinoris Drive
Wood Dale, Illinois 60191
773-774-6666 (Phone) | 773-774-6690 (Fax)
www.capacitorindustries.com
info@capacitorindustries.com

	Dimension	Tolerance
Diameter (D) Case/Cover	**2.17/2.27**	**0.06**
Case Height (H)	**4.70**	**max.**
Terminal Height (K)	**0.56**	**ref.**
Terminal-Terminal (M)	**0.81**	**ref.**
Insulating Cup (dia.)	**0.74**	

Dimensions in inches

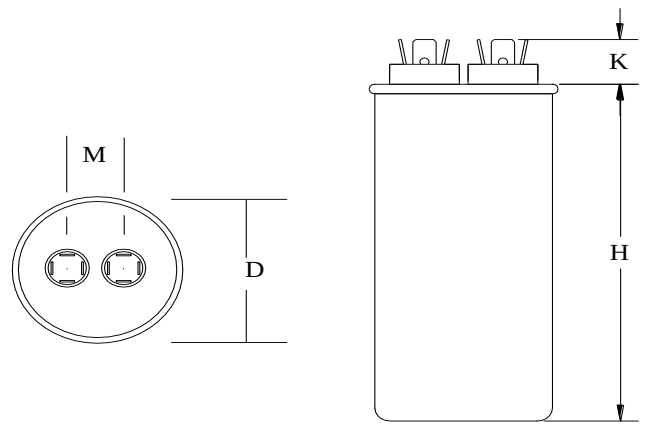

Stamping

Wuxi - Motor Cap
CBB65-660R236
23.5uF 5% 660 VAC
-25 - +85 C. 50/60 Hz.

Protected 10,000 AFC

Non PCB Date Code RoHs

Manufacture with Extra Heavy Internal End Spray

Approval : *J.D. Aldana*
Date : **September 26, 2007**