


Part Number	CBB65-660R346R		Revision	
Customer P/N			Revision	
Capacitance	34	μ F.	Tolerance	5.0%
Voltage	660	VAC		
Dielectric	Metallized Polypropylene			
Terminal Type	2-Spade Quick Connect Terminals			
Operating Temperature	-40 °C.-		85 °C.	
Dissipation Factor	0.0001	maximum	@ 60 Hz.	

MOTOR Capacitors, Inc.

Motor Capacitors, Inc.
 335 Beinoris Drive
 Wood Dale, Illinois 60191
 773-774-6666 (Phone) | 773-774-6690 (Fax)
www.capacitorindustries.com
info@capacitorindustries.com

	Dimension	Tolerance
Diameter (D) Case/Cover	2.48/2.58	0.06
Case Height (H)	5.68	0.06
Terminal Height (K)	0.56	ref.
Terminal-Terminal (M)	0.81	ref.
Insulating Cup (dia.)	0.74	

Dimensions in inches

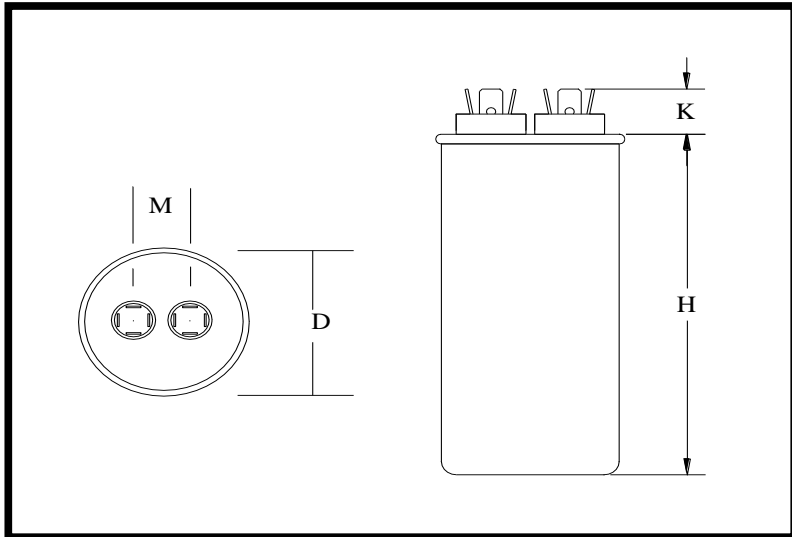

Stamping

Wuxi - Motor Cap
CBB65-660R346R
34 μ F 5% 660 VAC
-40 - +85 C. 50/60 Hz.
Internal Resistor 570K ohm 2 W
Protected 10,000 AFC
Non PCB Date Code RoHs

570K-ohm 2-watt Bleeder Resistor Attached

Approval : *J.D. Aldana*
 Date : June 3, 2005